

Product Collection

General Catalog - January 2023

SOUND:

THE MOST
EMOTIONAL
PART OF EVERY
EXPERIENCE

(whether it was a show in a theatre,
a rock festival or creating important
soundscapes in workspaces, retails and
hotel lobbies)

Our passion for well-designed sound has always been the driving force behind all that we do and create for you. The love for good sound is also the purpose that shapes our unity with consultants, integrators, designers, sound engineers and event producers around the world, by putting the right tools in their hands and enabling people to live a satisfying and more emotional life, which is the highest and most noble goal we want to achieve.

As great minds think together, we created this vast range of products to start working and sharing our knowledge to give more and better solutions to everyday problems in more and more demanding projects. We know you love good sound and beauty. So that we, as partners, can support you in your pursuit to make Sound matter for a better world.


BE PART OF THE SOLUTION!



Alessandro




Massimo



INSTALLED SOLUTIONS

WE GIVE SPACE
TO YOUR SPACE

K-array's installed solutions deliver an unparalleled blend of high performance and premium aesthetics that minimizes the size and number of speakers you need for an optimal sound experience in any specific environment.




LIVE PRO SOUND

THE DIFFERENCE IN BEING
AND BEING ON DISPLAY

We create innovative alternatives for you, artists, performers and sound engineers in the live sound sector by developing increasingly slim and compact products with a very high sound performance. The sound comes in all its purity.





INSTALLED SOLUTIONS

At K-array, we pay obsessive attention to details. High quality craftsmanship, textures and finishes. We make our own parts to customize our designs as we want them. We always thrived with challenges and even after 30 years we continue to make and develop products with a pinch of magic, aimed at returning sound to its pure form which is invisible to the naked eye by reducing sizes, and pushing the boundaries of component performances like never before.

We love to express our extreme obsession for perfect sound and share our enthusiasm of product design with our passion to make the world sound better for our own well-being.



Composed of closely-spaced, full-range sound sources, all our line array elements feature our innovative Pure Array Technology (PAT). With no drivers dedicated to the high frequencies, no bass reflex or passive radiators dedicated to the low end, there are no crossover points and a perfect phase response is achieved in both the near and far fields.

All the sound sources in the array are identical and perfectly coupled producing a true line array with the benefit of having the sound beam radiated by the column that is very wide on the horizontal plane and very narrow on the vertical plane.

The amount of energy sent towards the ceiling and the floor is then minimized greatly improving intelligibility in highly reverberant environments like houses of worship and conference rooms.

Furthermore, such a focused sound beam is able to cover a long distance uniformly. The audience located in front of the array and at the back of the venue will experience the same tonal balance without the need for several delay lines. With no horns and no waveguides, PAT columns can be joined to create longer arrays. The longer the array, the narrower the sound beam and the further the distance that can be covered uniformly.



Family Products	Pag		
Azimut	12	Python	30
Lyzard	18	Kobra	31
Vyper	22	Anakonda	32
Kobra	28	Pinnacle	56

All the latest K-array electronics can be controlled remotely with any software capable of communicating on the network via REST (Representational State Transfer) commands, which is a low-level data transmission system that uses the common HTTP protocol without any additional layers. K-array DSPs show APIs (Application Programming Interfaces) dedicated to managing, monitoring and programming the devices through simple and customizable REST commands, which can be transmitted over the network without the need to implement particular or proprietary protocols.

- MEDIA PLAYER
- OUTPUT LEVELS
- ON/OFF SWITCHING
- SOURCE SELECTION
- CHANNEL MUTING
- PRESET RECALLING
- MATRIX ROUTING



You can make K-array's ultra-sleek and unique products work with your Crestron Home Control System. Finally, the perfect combination of discreet elegance and powerful high-quality sound meets cutting-edge automation in the same system. K-array has developed its own plug-in to install onto your Crestron Home electronics in order to control the media player and sound levels of the K-array amps connected to your system.

- MEDIA PLAYER
- OUTPUT LEVELS
- ON/OFF SWITCHING
- SOURCE SELECTION
- CHANNEL MUTING
- PRESET RECALLING
- MATRIX ROUTING



The plug-in that gives your Crestron Electronics full control on K-array amps is finally out there! Download and install it, then get ready to have full management of the output levels, on/off switching, integrated media player, source selection and mute mode on each in/out channel of all your K-array amps connected to your systems.

- MEDIA PLAYER
- OUTPUT LEVELS
- ON/OFF SWITCHING
- SOURCE SELECTION
- CHANNEL MUTING
- PRESET RECALLING
- MATRIX ROUTING



To easily integrate K-array's latest electronics with any Q-SYS configuration, download and install the dedicated plugin on your Q-SYS control device to allow it to recall different K-array product presets, change the in-out matrix settings and manage the output levels of all the connected K-array devices.

- MEDIA PLAYER
- OUTPUT LEVELS
- ON/OFF SWITCHING
- SOURCE SELECTION
- CHANNEL MUTING
- PRESET RECALLING
- MATRIX ROUTING




Integrating K-array's latest electronics with any Control4 system has become easy: download and install the dedicated plugging on your Control4 device, allow it to recall different K-array product presets and manage the output levels of all the connected K-array technologies.

- MEDIA PLAYER
- OUTPUT LEVELS
- ON/OFF SWITCHING
- SOURCE SELECTION
- CHANNEL MUTING
- PRESET RECALLING
- MATRIX ROUTING



K-array's latest electronics can be easily controlled by AMX modules as well. Download and install the dedicated plugin on your AMX control device to recall different K-array product presets, change the in-out matrix settings and manage the output levels of all the connected K-array devices straight from your control system.

Premium Materials & Finishes

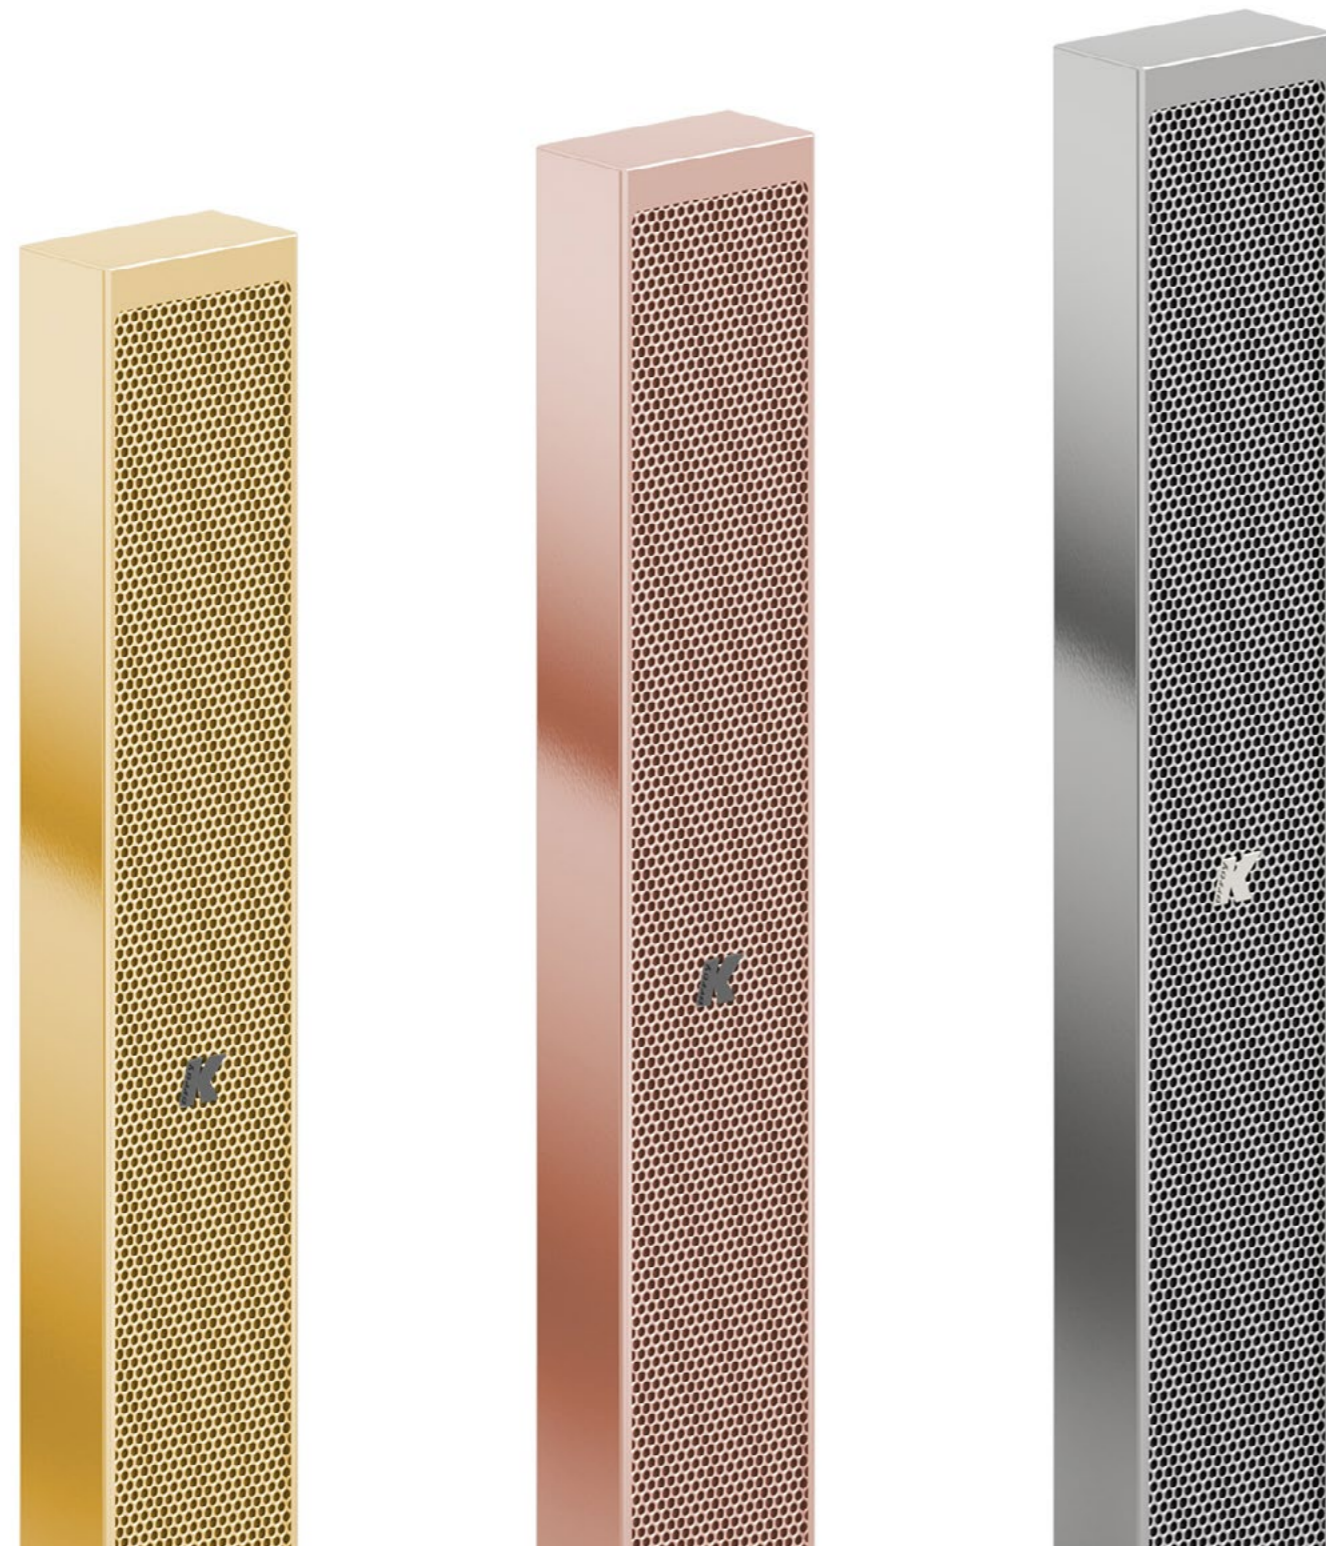

K-array utilizes the most durable and resistant materials when developing our products to offer the most reliable solutions on the market. Weather resistant speaker systems made of aluminum and steel make up the frame of all products within the K-array portfolio.

Versatile and efficient, aluminum provides strong structural support without adding excess weight to the products. Naturally generating a protective oxide coating, aluminum is particularly useful for protection and conservation rendering a K-array installation dependable, regardless of the application elements.

Steel is the other functional material K-array implements, which offers corrosion resistance and strength. Stainless steel does not readily corrode, rust or stain with water making those products perfect for aquatic environments as well as traditional settings.


Premium products are also created with high-quality luxury finishes made of precious materials, like gold, to blend beauty with exceptional performance. Additionally, there is a range of colors and finishes that assist in integrating the products into various applications.

Sleek black and elegant white make a subtle statement while a customized color using any RAL code can perfectly match the venue. Also, brushed or polished stainless steel finishes are available which give the product a chameleon-like ability to mirror surrounding surfaces and blend in with the background.



Making more durable, longer-lasting products with materials that are easily recyclable at the end of their life, like aluminum and stainless steel supports a more circular and sustainable economy.

24K Gold	Antique Gold	Rose Gold	Polished	Brushed																																																																																																																																																																																																																																
<table border="0"> <tr><td>AZIMUT</td><td>KAYMAN</td></tr> <tr><td>KAMUT2L1</td><td>KY52</td></tr> <tr><td>KAMUT2L14</td><td>KY102</td></tr> <tr><td>KAMUT2V25</td><td></td></tr> <tr><td>KAMUT2L</td><td>TORNADO</td></tr> <tr><td></td><td>KT2</td></tr> <tr><td>LYZARD</td><td>KT2C</td></tr> <tr><td>KZ1</td><td></td></tr> <tr><td>KZ14</td><td>DOMINO</td></tr> <tr><td></td><td>KF26</td></tr> <tr><td>VYPER</td><td>KF210</td></tr> <tr><td>KV25</td><td>KF212</td></tr> <tr><td>KV52</td><td></td></tr> <tr><td>KV102</td><td>RUMBLE</td></tr> <tr><td></td><td>KU44</td></tr> <tr><td>KOBRA</td><td>KU26</td></tr> <tr><td>KK52</td><td>KU210</td></tr> <tr><td>KK102</td><td>KU212</td></tr> <tr><td></td><td></td></tr> <tr><td>PYTHON</td><td>PINNACLE</td></tr> <tr><td>KP52</td><td>KR2</td></tr> <tr><td>KP102</td><td>KR3</td></tr> <tr><td></td><td>KR4</td></tr> </table>	AZIMUT	KAYMAN	KAMUT2L1	KY52	KAMUT2L14	KY102	KAMUT2V25		KAMUT2L	TORNADO		KT2	LYZARD	KT2C	KZ1		KZ14	DOMINO		KF26	VYPER	KF210	KV25	KF212	KV52		KV102	RUMBLE		KU44	KOBRA	KU26	KK52	KU210	KK102	KU212			PYTHON	PINNACLE	KP52	KR2	KP102	KR3		KR4	<table border="0"> <tr><td>AZIMUT</td><td>KAYMAN</td></tr> <tr><td>KAMUT2L1</td><td>KY52</td></tr> <tr><td>KAMUT2L14</td><td>KY102</td></tr> <tr><td>KAMUT2V25</td><td></td></tr> <tr><td>KAMUT2L</td><td>TORNADO</td></tr> <tr><td></td><td>KT2</td></tr> <tr><td>LYZARD</td><td>KT2C</td></tr> <tr><td>KZ1</td><td></td></tr> <tr><td>KZ14</td><td>DOMINO</td></tr> <tr><td></td><td>KF26</td></tr> <tr><td>VYPER</td><td>KF210</td></tr> <tr><td>KV25</td><td>KF212</td></tr> <tr><td>KV52</td><td></td></tr> <tr><td>KV102</td><td>RUMBLE</td></tr> <tr><td></td><td>KU44</td></tr> <tr><td>KOBRA</td><td>KU26</td></tr> <tr><td>KK52</td><td>KU210</td></tr> <tr><td>KK102</td><td>KU212</td></tr> <tr><td></td><td></td></tr> <tr><td>PYTHON</td><td>PINNACLE</td></tr> <tr><td>KP52</td><td>KR2</td></tr> <tr><td>KP102</td><td>KR3</td></tr> <tr><td></td><td>KR4</td></tr> </table>	AZIMUT	KAYMAN	KAMUT2L1	KY52	KAMUT2L14	KY102	KAMUT2V25		KAMUT2L	TORNADO		KT2	LYZARD	KT2C	KZ1		KZ14	DOMINO		KF26	VYPER	KF210	KV25	KF212	KV52		KV102	RUMBLE		KU44	KOBRA	KU26	KK52	KU210	KK102	KU212			PYTHON	PINNACLE	KP52	KR2	KP102	KR3		KR4	<table border="0"> <tr><td>AZIMUT</td><td>TORNADO</td></tr> <tr><td>KAMUT2L1</td><td>KT2</td></tr> <tr><td>KAMUT2L14</td><td>KT2C</td></tr> <tr><td>KAMUT2V25</td><td></td></tr> <tr><td>KAMUT2L</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>LYZARD</td><td></td></tr> <tr><td>KZ1</td><td></td></tr> <tr><td>KZ14</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>VYPER</td><td></td></tr> <tr><td>KV25</td><td></td></tr> <tr><td>KV52</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>KOBRA</td><td></td></tr> <tr><td>KK52</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>PYTHON</td><td></td></tr> <tr><td>KP52</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>KAYMAN</td><td></td></tr> <tr><td>KY52</td><td></td></tr> </table>	AZIMUT	TORNADO	KAMUT2L1	KT2	KAMUT2L14	KT2C	KAMUT2V25		KAMUT2L				LYZARD		KZ1		KZ14				VYPER		KV25		KV52				KOBRA		KK52				PYTHON		KP52				KAYMAN		KY52		<table border="0"> <tr><td>AZIMUT</td><td>KAYMAN</td></tr> <tr><td>KAMUT2L1</td><td>KY52</td></tr> <tr><td>KAMUT2L14</td><td>KY102</td></tr> <tr><td>KAMUT2V25</td><td></td></tr> <tr><td>KAMUT2L</td><td>TORNADO</td></tr> <tr><td></td><td>KT2</td></tr> <tr><td>LYZARD</td><td>KT2C</td></tr> <tr><td>KZ1</td><td></td></tr> <tr><td>KZ14</td><td>DOMINO</td></tr> <tr><td></td><td>KF26</td></tr> <tr><td>VYPER</td><td>KF210</td></tr> <tr><td>KV25</td><td>KF212</td></tr> <tr><td>KV52</td><td></td></tr> <tr><td>KV102</td><td>RUMBLE</td></tr> <tr><td></td><td>KU44</td></tr> <tr><td>KOBRA</td><td>KU26</td></tr> <tr><td>KK52</td><td>KU210</td></tr> <tr><td>KK102</td><td>KU212</td></tr> <tr><td></td><td></td></tr> <tr><td>PYTHON</td><td>PINNACLE</td></tr> <tr><td>KP52</td><td>KR2</td></tr> <tr><td>KP102</td><td>KR3</td></tr> <tr><td></td><td>KR4</td></tr> </table>	AZIMUT	KAYMAN	KAMUT2L1	KY52	KAMUT2L14	KY102	KAMUT2V25		KAMUT2L	TORNADO		KT2	LYZARD	KT2C	KZ1		KZ14	DOMINO		KF26	VYPER	KF210	KV25	KF212	KV52		KV102	RUMBLE		KU44	KOBRA	KU26	KK52	KU210	KK102	KU212			PYTHON	PINNACLE	KP52	KR2	KP102	KR3		KR4	<table border="0"> <tr><td>KOBRA</td><td>RUMBLE</td></tr> <tr><td>KK52</td><td>KU44</td></tr> <tr><td>KK102</td><td>KU26</td></tr> <tr><td></td><td>KU210</td></tr> <tr><td></td><td>KU212</td></tr> <tr><td>PYTHON</td><td></td></tr> <tr><td>KP52</td><td></td></tr> <tr><td>KP102</td><td>PINNACLE</td></tr> <tr><td></td><td>KR2</td></tr> <tr><td>KAYMAN</td><td>KR3</td></tr> <tr><td>KY52</td><td>KR4</td></tr> <tr><td>KY102</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>TORNADO</td><td></td></tr> <tr><td>KT2</td><td></td></tr> <tr><td>KT2C</td><td></td></tr> <tr><td></td><td></td></tr> <tr><td>DOMINO</td><td></td></tr> <tr><td>KF26</td><td></td></tr> <tr><td>KF210</td><td></td></tr> <tr><td>KF212</td><td></td></tr> </table>	KOBRA	RUMBLE	KK52	KU44	KK102	KU26		KU210		KU212	PYTHON		KP52		KP102	PINNACLE		KR2	KAYMAN	KR3	KY52	KR4	KY102				TORNADO		KT2		KT2C				DOMINO		KF26		KF210		KF212	
AZIMUT	KAYMAN																																																																																																																																																																																																																																			
KAMUT2L1	KY52																																																																																																																																																																																																																																			
KAMUT2L14	KY102																																																																																																																																																																																																																																			
KAMUT2V25																																																																																																																																																																																																																																				
KAMUT2L	TORNADO																																																																																																																																																																																																																																			
	KT2																																																																																																																																																																																																																																			
LYZARD	KT2C																																																																																																																																																																																																																																			
KZ1																																																																																																																																																																																																																																				
KZ14	DOMINO																																																																																																																																																																																																																																			
	KF26																																																																																																																																																																																																																																			
VYPER	KF210																																																																																																																																																																																																																																			
KV25	KF212																																																																																																																																																																																																																																			
KV52																																																																																																																																																																																																																																				
KV102	RUMBLE																																																																																																																																																																																																																																			
	KU44																																																																																																																																																																																																																																			
KOBRA	KU26																																																																																																																																																																																																																																			
KK52	KU210																																																																																																																																																																																																																																			
KK102	KU212																																																																																																																																																																																																																																			
PYTHON	PINNACLE																																																																																																																																																																																																																																			
KP52	KR2																																																																																																																																																																																																																																			
KP102	KR3																																																																																																																																																																																																																																			
	KR4																																																																																																																																																																																																																																			
AZIMUT	KAYMAN																																																																																																																																																																																																																																			
KAMUT2L1	KY52																																																																																																																																																																																																																																			
KAMUT2L14	KY102																																																																																																																																																																																																																																			
KAMUT2V25																																																																																																																																																																																																																																				
KAMUT2L	TORNADO																																																																																																																																																																																																																																			
	KT2																																																																																																																																																																																																																																			
LYZARD	KT2C																																																																																																																																																																																																																																			
KZ1																																																																																																																																																																																																																																				
KZ14	DOMINO																																																																																																																																																																																																																																			
	KF26																																																																																																																																																																																																																																			
VYPER	KF210																																																																																																																																																																																																																																			
KV25	KF212																																																																																																																																																																																																																																			
KV52																																																																																																																																																																																																																																				
KV102	RUMBLE																																																																																																																																																																																																																																			
	KU44																																																																																																																																																																																																																																			
KOBRA	KU26																																																																																																																																																																																																																																			
KK52	KU210																																																																																																																																																																																																																																			
KK102	KU212																																																																																																																																																																																																																																			
PYTHON	PINNACLE																																																																																																																																																																																																																																			
KP52	KR2																																																																																																																																																																																																																																			
KP102	KR3																																																																																																																																																																																																																																			
	KR4																																																																																																																																																																																																																																			
AZIMUT	TORNADO																																																																																																																																																																																																																																			
KAMUT2L1	KT2																																																																																																																																																																																																																																			
KAMUT2L14	KT2C																																																																																																																																																																																																																																			
KAMUT2V25																																																																																																																																																																																																																																				
KAMUT2L																																																																																																																																																																																																																																				
LYZARD																																																																																																																																																																																																																																				
KZ1																																																																																																																																																																																																																																				
KZ14																																																																																																																																																																																																																																				
VYPER																																																																																																																																																																																																																																				
KV25																																																																																																																																																																																																																																				
KV52																																																																																																																																																																																																																																				
KOBRA																																																																																																																																																																																																																																				
KK52																																																																																																																																																																																																																																				
PYTHON																																																																																																																																																																																																																																				
KP52																																																																																																																																																																																																																																				
KAYMAN																																																																																																																																																																																																																																				
KY52																																																																																																																																																																																																																																				
AZIMUT	KAYMAN																																																																																																																																																																																																																																			
KAMUT2L1	KY52																																																																																																																																																																																																																																			
KAMUT2L14	KY102																																																																																																																																																																																																																																			
KAMUT2V25																																																																																																																																																																																																																																				
KAMUT2L	TORNADO																																																																																																																																																																																																																																			
	KT2																																																																																																																																																																																																																																			
LYZARD	KT2C																																																																																																																																																																																																																																			
KZ1																																																																																																																																																																																																																																				
KZ14	DOMINO																																																																																																																																																																																																																																			
	KF26																																																																																																																																																																																																																																			
VYPER	KF210																																																																																																																																																																																																																																			
KV25	KF212																																																																																																																																																																																																																																			
KV52																																																																																																																																																																																																																																				
KV102	RUMBLE																																																																																																																																																																																																																																			
	KU44																																																																																																																																																																																																																																			
KOBRA	KU26																																																																																																																																																																																																																																			
KK52	KU210																																																																																																																																																																																																																																			
KK102	KU212																																																																																																																																																																																																																																			
PYTHON	PINNACLE																																																																																																																																																																																																																																			
KP52	KR2																																																																																																																																																																																																																																			
KP102	KR3																																																																																																																																																																																																																																			
	KR4																																																																																																																																																																																																																																			
KOBRA	RUMBLE																																																																																																																																																																																																																																			
KK52	KU44																																																																																																																																																																																																																																			
KK102	KU26																																																																																																																																																																																																																																			
	KU210																																																																																																																																																																																																																																			
	KU212																																																																																																																																																																																																																																			
PYTHON																																																																																																																																																																																																																																				
KP52																																																																																																																																																																																																																																				
KP102	PINNACLE																																																																																																																																																																																																																																			
	KR2																																																																																																																																																																																																																																			
KAYMAN	KR3																																																																																																																																																																																																																																			
KY52	KR4																																																																																																																																																																																																																																			
KY102																																																																																																																																																																																																																																				
TORNADO																																																																																																																																																																																																																																				
KT2																																																																																																																																																																																																																																				
KT2C																																																																																																																																																																																																																																				
DOMINO																																																																																																																																																																																																																																				
KF26																																																																																																																																																																																																																																				
KF210																																																																																																																																																																																																																																				
KF212																																																																																																																																																																																																																																				



Azimut mark II

A complete solution in a minimalist design package



WI-FI



USB MULTIMEDIA PLAYER




ETHERNET



OPTICAL INPUT



Bluetooth



Spotify




Plugins available for



discover more






Azimut II

A complete solution in a minimalist design package



Azimut II

A complete solution in a minimalist design package



SYSTEMS

- Restaurants and Cafes
- Hotels and Resorts
- Retail
- Museums and Exhibitions
- Residential



SYSTEMS

- Restaurants and Cafes
- Hotels and Resorts
- Retail
- Museums and Exhibitions
- Residential

- WI-FI
- USB MULTIMEDIA PLAYER
- ETHERNET
- OPTICAL INPUT
- Bluetooth
- Spotify

- WI-FI
- USB MULTIMEDIA PLAYER
- ETHERNET
- OPTICAL INPUT
- Bluetooth
- Spotify

new product 2023

Azimut-KAMUT2L1 II

Lizard-KZ1 I | Speaker

General

Type	Point source
Transducers	0.5" neodymium magnet woofer
Frequency Response	500 Hz - 18 kHz (-6 dB)
Max SPL	86 dB (peak)
Rated Power	3.5 W
Coverage	V. 140° H. 140°
Connectors	IN+ IN- screw terminals
Nominal Impedance	16 Ω

Handling & Finishes

Dimensions (WxHxD)	22 x 37 x 11 mm (0.9 x 1.5 x 0.4 in)
Weight	0.021 kg (0.046 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

Truffle-KTR24 | Subwoofer

General

Type	Passive subwoofer
Transducers	4" woofer + passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	112 dB (peak)
Rated Power	60 W
Coverage	Omni
Connectors	2PIN euroblock connector (included)
Nominal Impedance	4 Ω

Handling & Finishes

Dimensions (WxHxD)	122 x 117 x 199 mm (4.8 x 4.6 x 7.8 in)
Weight	1.5 kg (3.31 lb)
Material	Aluminum
Colors	Black
Finishes	Powder Matte
IP Rating	IP64

Kommander-KA02 I | Amplifier

For technical specifications, see page 43

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

new product 2023

Azimut-KAMUT2L14 II

Lizard-KZ14 I | Speaker

General

Type	Line array
Transducers	4 x 0.5" neodymium magnet woofers
Frequency Response	500 Hz - 18 kHz (-6 dB)
Max SPL	98 dB (peak)
Rated Power	15 W
Coverage	V. 40° H. 140°
Connectors	IN+ IN- screw terminals
Nominal Impedance	16 Ω

Handling & Finishes

Dimensions (WxHxD)	22 x 100 x 11 mm (0.9 x 3.9 x 0.4 in)
Weight	0.059 kg (0.130 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

Truffle-KTR25 | Subwoofer

General

Type	Passive subwoofer
Transducers	5.25" woofer + passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	115 dB (peak)
Rated Power	80 W
Coverage	Omni
Connectors	2PIN euroblock connector (included)
Nominal Impedance	4 Ω

Handling & Finishes

Dimensions (WxHxD)	152 x 147 x 258 mm (6.0 x 5.8 x 10.2 in)
Weight	2.5 kg (5.51 lb)
Material	Aluminum
Colors	Black
Finishes	Powder Matte
IP Rating	IP64

Kommander-KA02 I | Amplifier

For technical specifications, see page 43

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com


COLORS

- Black
- White
- Custom RAL

FINISHES

- 24K Gold
- Antique Gold
- Rose Gold
- Polished






Azimut II

A complete solution in a minimalist design package



Azimut II

A complete solution in a minimalist design package



SYSTEMS

- Restaurants and Cafes
- Hotels and Resorts
- Retail
- Museums and Exhibitions
- Residential



- WI-FI
- USB MULTIMEDIA PLAYER
- ETHERNET
- OPTICAL INPUT
- Bluetooth
- Spotify

Azimut-KAMUT2V25 II

Vyper-KV25 II | Speaker

General

Type	Line array
Transducers	4 x 1" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	108 dB (peak)
Rated Power	75 W
Coverage	V. 25° H. 140°
Connectors	2PIN euroblock connector (included)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes

Dimensions (WxHxD)	40 x 260 x 22 mm (1.6 x 10.2 x 0.9 in)
Weight	0.4 kg (0.88 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

Truffle-KTR26 | Subwoofer

General

Type	Passive subwoofer
Transducers	6.5" woofer + passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	120 dB (peak)
Rated Power	100 W
Coverage	Omni
Connectors	2PIN euroblock connector (included)
Nominal Impedance	2 Ω

Handling & Finishes

Dimensions (WxHxD)	182 x 176 x 341 mm (7.1 x 6.9 x 13.4 in)
Weight	3.5 kg (7.72 lb)
Material	Aluminum
Colors	Black
Finishes	Powder Matte
IP Rating	IP64

Kommander-KA02 I | Amplifier

For technical specifications, see page 43

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

- Black
- White
- Custom RAL
- 24K Gold
- Antique Gold
- Rose Gold
- Polished



SYSTEMS

- Restaurants and Cafes
- Hotels and Resorts
- Retail
- Museums and Exhibitions
- Residential



- WI-FI
- USB MULTIMEDIA PLAYER
- ETHERNET
- OPTICAL INPUT
- Bluetooth
- Spotify

Azimut-KAMUT2L II

Lizard-KZ14 I | Speaker

General

Type	Line array
Transducers	4 x 0.5" neodymium magnet woofers
Frequency Response	500 Hz - 18 kHz (-6 dB)
Max SPL	98 dB (peak)
Rated Power	15 W
Coverage	V. 40° H. 140°
Connectors	IN+ IN- screw terminals
Nominal Impedance	16 Ω

Handling & Finishes

Dimensions (WxHxD)	22 x 37 x 11 mm (0.9 x 1.5 x 0.4 in)
Weight	0.021 kg (0.046 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

Rumble-KU44-2 | Subwoofer

General

Type	Passive subwoofer
Transducers	2 x 4" neodymium magnet woofers
Frequency Response	2 x 4" passive radiators"
Max SPL	45 Hz - 150 / 500 Hz (-6 dB)
Rated Power	116 dB (peak)
Coverage	120 W
Connectors	2PIN euroblock connector (included)
Nominal Impedance	2 Ω

Handling & Finishes

Dimensions (WxHxD)	500 x 116 x 100 mm (19.7 x 4.6 x 4.0 in) (3)
Weight	5.9 kg (13.0 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Polished, Brushed
IP Rating	IP64 (4)

Kommander-KA02 I | Amplifier

For technical specifications, see page 43

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

- Black
- White
- Custom RAL
- 24K Gold
- Antique Gold
- Rose Gold
- Polished





The ICONIC LYZARD Miniaturized Loudspeaker Has A New Design!

K-array's most iconic loudspeaker for installed solutions has been redesigned with an even sleeker miniaturized premium aluminum body. For discreet use in a variety of intimate environments, such as retail stores, high-quality restaurants, bars and museums, the remarkable mid-high micro-loudspeakers, comprised of the **Lyzard-KZ1 mark I** and **Lyzard-KZ14 mark I**, are designed for the best sound experience with the lowest visual-impact including a flush-mounting model.





Lyzard I

Ultra-miniature aluminum line array element

SPEAKERS

Restaurants and Cafes

Hotels and Resorts

Retail

Museums and Exhibitions

Residential

Yachting



Lyzard I

Ultra-miniature aluminum line array element



SPEAKERS

Restaurants and Cafes

Hotels and Resorts

Retail

Museums and Exhibitions

Residential

Yachting

- COLORS
- Black
 - White
 - Custom RAL

- FINISHES
- 24K Gold
 - Antique Gold
 - Rose Gold
 - Polished



new product 2023

Lyzard-KZ1 I / Lyzard-KZ1R I

General

Type	Point source
Transducers	0.5" neodymium magnet woofer
Frequency Response	500 Hz - 18 kHz (-6 dB)
Max SPL	86 dB (peak)
Rated Power	3.5 W
Coverage	V. 140° H. 140°
Connectors	IN+ IN- screw terminals
Nominal Impedance	16 Ω

Handling & Finishes

Dimensions (WxHxD)	22 x 37 x 11 mm (0.9 x 1.5 x 0.4 in)
Weight	0.021 kg (0.046 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



new product 2023

Lyzard-KZ14 I / Lyzard-KZ14R I

General

Type	Line array
Transducers	4 x 0.5" neodymium magnet woofers
Frequency Response	500 Hz - 18 kHz (-6 dB)
Max SPL	98 dB (peak)
Rated Power	15 W
Coverage	V. 40° H. 140°
Connectors	IN+ IN- screw terminals
Nominal Impedance	16 Ω

Handling & Finishes

Dimensions (WxHxD)	22 x 100 x 11 mm (0.9 x 3.9 x 0.4 in)
Weight	0.059 kg (0.130 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

- COLORS
- Black
 - White
 - Custom RAL

- FINISHES
- 24K Gold
 - Antique Gold
 - Rose Gold
 - Polished






Ultra-flat aluminum line array element

The Vypers are the flattest speakers in the K-array portfolio that feature closely-spaced transducers with K-array's Pure Array Technology housed in an elegant aluminum frame to make the sound loud while being discreet at the same time. We made the integration of Vyper even more invisible by providing 3 more models designed exclusively to be embedded in the surfaces.

NOT RECESSED



RECESSED

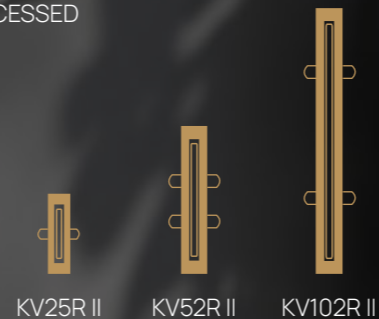

discover more



SPEAKERS

- Residential
- Home Cinema
- Restaurant and Cafes
- Hotels and Resorts
- Cruise Ships
- Yachting
- Houses of Worship
- Broadcast and Studios



Vyper-KV25 II / KV25R II



IP65
accessory included

General

Type	Line array
Transducers	4 x 1" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	108 dB (peak)
Rated Power	75 W
Coverage	V. 25° H. 140°
Connectors	2PIN euroblock connector (included)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes


Dimensions (WxHxD)	KV25 II 40 x 260 x 22 mm (1.6 x 10.2 x 0.9 in) KV25R II 50 x 270 x 37 mm (1.95 x 10.63 x 1.45 in)
Weight	KV25 II 0.4 Kg (0.88 lb) KV25R II 0.4 Kg (0.88 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

- COLORS
- Black
 - White
 - Custom RAL

- FINISHES
- 24K Gold
 - Antique Gold
 - Rose Gold
 - Polished





Vyper II

Ultra-flat aluminum line array element

SPEAKERS

- Residential
- Home Cinema
- Restaurant and Cafes
- Hotels and Resorts
- Cruise Ships
- Yachting
- Houses of Worship
- Broadcast and Studios

- COLORS
- Black
 - White
 - Custom RAL

- FINISHES
- 24K Gold
 - Antique Gold
 - Rose Gold
 - Polished



Vyper-KV52 II / KV52F II / KV52R

General	
Type	KV52 II Line array KV52F II Point Source
Transducers	8 x 1" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	114 dB (peak)
Rated Power	150 W
Coverage	KV52 II V. 10° H. 140° KV52F II V. 60° H. 140°
Connectors	2PIN euroblock connector (included)
Nominal Impedance	16 Ω / 64 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	KV52 II 40 x 500 x 22 mm (1.6 x 19.7 x 0.9 in) KV52R II 50 x 510 x 37 mm (1.95 x 20.08 x 1.45 in)
Weight	KV52 II 0.8 Kg (1.54 lb) KV52R II 0.8 Kg (1.54 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Rose Gold, Polished
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



IP65
accessory
included



IP65
accessory
included



Vyper-KV102 II / KV102R II

General	
Type	Line array
Transducers	16 x 1" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	120 dB (peak)
Rated Power	300 W
Coverage	V. 7° H. 140°
Connectors	2PIN euroblock connector (included)
Nominal Impedance	8 Ω / 32 Ω selectable



Handling & Finishes	
Dimensions (WxHxD)	KV102 II 40 x 1000 x 22 mm (1.6 x 39.3 x 0.9 in) KV102R II 50 x 1010 x 37 mm (1.95 x 39.76 x 1.45 in)
Weight	KV102 II 1.8 Kg (3.96 lb) KV102R II 1.8 Kg (3.96 lb)
Material	Aluminum
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Vyper II

Ultra-flat aluminum line array element


SPEAKERS

- Residential
- Home Cinema
- Restaurant and Cafes
- Hotels and Resorts
- Cruise Ships
- Yachting
- Houses of Worship
- Broadcast and Studios


- COLORS
- Black
 - White
 - Custom RAL

- FINISHES
- 24K Gold
 - Antique Gold
 - Polished





Premium
aluminum
millwork



Built to last

The Vyper line is designed and hand-assembled in Italy. Elegant and resistant 2"-cm-deep aluminum frame turned on a lathe from a solid metal block.

IP65
accessory
included



Kobra

Stainless steel line array element with 2" drivers



Spot Flood

Selectable Coverage

The directivity of many K-array solutions can be modified in order to optimize the coverage. Our column loudspeakers are equipped with a regulator with two coverage options: SPOT for very narrow sound dispersion and FLOOD for wider coverage.



discover more



The Kobra line is a great example of K-array's **unique performance-to-size ratio** passive speakers housed in a sleek, durable stainless steel frame.




Kobra-KK52 I

General	
Type	Line array
Transducers	8 x 2" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	120 dB (peak)
Rated Power	200 W
Coverage	V. 10° - 60° H. 120°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	16 Ω / 64 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	59 x 497 x 81 mm (2.3 x 19.6 x 3.2 in)
Weight	2.3 kg (5.07 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

Kobra

Stainless steel line array element with 2" drivers



Kobra-KK102 I

General	
Type	Line array
Transducers	16 x 2" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	126 dB (peak)
Rated Power	400 W
Coverage	V. 7° - 35° H. 120°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	59 x 1000 x 81 mm (2.3 x 39.4 x 3.2 in)
Weight	4.8 kg (10.6 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

SPEAKERS

- Restaurants and Cafes
- Theaters
- Retail
- Auditoriums and Concert Halls
- Stadiums and Sport Venues
- Theme Parks
- Houses of Worship
- Boardrooms and Conference Rooms

- Black
- White
- Custom RAL
- 24K Gold
- Antique Gold
- Polished
- Brushed



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Python

Stainless steel line array element with 3.15" drivers

Comprised of 3.15" drivers housed in a **resistant stainless steel frame**, the Python passive **discreet speakers resist to corrosion, rust or stain** and are perfect for a great variety of both indoor and outdoor applications.

SPEAKERS

- Restaurants and Cafes
- Theaters
- Retail
- Auditoriums and Concert Halls
- Stadiums and Sport Venues
- Theme Parks
- Houses of Worship
- Boardrooms and Conference Rooms



Python-KP52 I

General	
Type	Line array
Transducers	6 x 3.15" neodymium magnet woofers
Frequency Response	120 Hz - 18 kHz (-6 dB)
Max SPL	128 dB (peak)
Rated Power	360 W
Coverage	V. 10° - 45° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	89 x 520 x 118 mm (3.5 x 20.5 x 4.7 in)
Weight	5.8 kg (12.78 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

- Black
- White
- Custom RAL
- 24K Gold
- Antique Gold
- Polished
- Brushed



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Kayman

Stainless steel line array element with 4" drivers

ADVANCED LINE ARRAY

Like the Kobras and Pythons, the Kayman line is an advanced passive line array speaker with a sleek design in a stainless steel frame.

Their **4" neodymium magnet transducers** make the **Kaymans the most powerful column system** of the line and the best choice for tours in theaters too.



SPEAKERS

- Restaurants and Cafes
- Theaters
- Retail
- Auditoriums and Concert Halls
- Stadiums and Sport Venues
- Theme Parks
- Houses of Worship
- Boardrooms and Conference Rooms



Python-KP102 I

General	
Type	Line array
Transducers	12 x 3.15" neodymium magnet woofers
Frequency Response	120 Hz - 18 kHz (-6 dB)
Max SPL	134 dB (peak)
Rated Power	720 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	4 Ω / 16 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	89 x 1000 x 118 mm (3.5 x 39.4 x 4.7 in)
Weight	12.0 kg (26.5 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant



Kayman-KV52

General	
Type	Line array
Transducers	4 x 4" neodymium magnet woofers
Frequency Response	120 Hz - 20 kHz (-6 dB)
Max SPL	132 dB (peak)
Rated Power	600 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	4 Ω / 16 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	
Weight	
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64 (3)



Kayman-KV102

General	
Type	Line array
Transducers	8 x 4" neodymium magnet woofers
Frequency Response	120 Hz - 20 kHz (-6 dB)
Max SPL	138 dB (peak)
Rated Power	1200 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	116 x 1000 x 134 mm (4.6 x 39.4 x 5.3 in)
Weight	14.9 kg (32.8 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64

- Black
- White
- Custom RAL
- 24K Gold
- Antique Gold
- Polished
- Brushed



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Anakonda

Flexible, 2-meter-long loudspeaker



SPEAKERS



When we talk about

UNIQUE AUDIO SOLUTIONS,


our Anakonda series is the first one that comes to mind as it's the most revolutionary speaker in our product portfolio.

It is designed as a problem solver for situations where a traditional speaker box can't be used, but where good intelligibility, ultra-reliability and a sleek design are required.



Anakonda

Flexible, 2-meter-long loudspeaker



Flexuous Body

A flexo PET-grade braid exterior permits the speaker to bend into any seamless shape that you desire while protecting the 1" cone drivers foreign objects such as dust.

Modular Capabilities

For maximum adaptability to any environment, the 2-meter-long pure line array Anakondas are modular units that can combine together to reach the desired length and guarantee perfect linear coverage.

Anakonda-KAN200

General	
Type	Line array
Transducers	8 x 1" neodymium magnet woofer
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	102 dB (peak)
Rated Power	150 W
Coverage	V. 10° H. 140°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	64 Ω

Handling & Finishes	
Dimensions (WxHxD)	2000 (±20 mm) x 56 x 35 mm (79.5 (±0.8 in) x 2.2 x 1.4 in)
Weight	1.4 kg (3.1 lb)
Material	PVC/Neoprene
Colors	Black, White
IP Rating	IP64

Anakonda-KAN200+

General	
Type	Line array
Transducers	16 x 1" neodymium magnet woofer
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	108 dB (peak)
Rated Power	300 W
Coverage	V. 10° H. 140°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	32 Ω


Handling & Finishes	
Dimensions (WxHxD)	2000 (±20 mm) x 56 x 35 mm (79.5 (±0.8 in) x 2.2 x 1.4 in)
Weight	1.9 kg (4.2 lb)
Material	PVC/Neoprene
Colors	Black, White
IP Rating	IP64

Anakonda-KAN200+8

General	
Type	Line array
Transducers	16 x 1" neodymium magnet woofer
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	108 dB (peak)
Rated Power	300 W
Coverage	V. 10° H. 140°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω


Handling & Finishes	
Dimensions (WxHxD)	2000 (±20 mm) x 56 x 35 mm (79.5 (±0.8 in) x 2.2 x 1.4 in)
Weight	1.9 kg (4.2 lb)
Material	PVC/Neoprene
Colors	Black, White
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



discover more





Tornado


2" point source speakers carved from aluminum

With the ability to effortlessly reproduce both speech and music, the Tornado line is an excellent choice for many applications such as transportation hubs, museum exhibitions, restaurants, and retail.



Tornado

2" point source speakers carved from aluminum



WALL MOUNTING



Tornado-KT2 / Tornado-KT2-HV

General		Handling & Finishes	
Type	Point source	Dimensions (WxHxD)	74 x 74 x 118 mm (2.91 x 2.91 x 4.65 in)
Transducers	2" neodymium magnet woofer	Weight	0.6 kg (1.32 lb)
Frequency Response	150 Hz - 18 kHz (-6 dB)	Material	Aluminum
Sensitivity (1W/1m)	89 dB SPL	Colors	Black, White, Custom RAL
Max SPL	100 dB (peak)	IP Rating	IP65
Rated Power	15 W	EN54-24	EN 54-24:2008 compliant
Coverage	V. 90° H. 90°		
Connectors	4PIN euroblock connector (included)		
Nominal Impedance	KT2 8 Ω / 32 Ω selectable KT2-HV 70V		

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

CEILING MOUNTING



Tornado-KT2C / Tornado-KT2C-HV

General		Handling & Finishes	
Type	Point source	Dimensions (WxHxD)	125 x 125 x 119 mm (4.92 x 4.92 x 4.69 in)
Transducers	2" neodymium magnet woofer	Weight	0.65 kg (1.43 lb)
Frequency Response	150 Hz - 18 kHz (-6 dB)	Material	Aluminum
Sensitivity (1W/1m)	89 dB SPL	Colors	Black, White, Custom RAL
Max SPL	100 dB (peak)	IP Rating	IP65
Rated Power	15 W	EN54-24	EN 54-24:2008 compliant
Coverage	V. 90° H. 90°		
Connectors	4PIN euroblock connector (included)		
Nominal Impedance	KT2C 8 Ω / 32 Ω selectable KT2C-HV 70V		

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



KA1-T2H | MINI-AMP Designed as passive speaker, the new Tornado can be easily converted into self-powered devices by inserting the KA1-T2H amplifier module. (32W)

- SPEAKERS
- Restaurants and Cafes
- Hotels and Resorts
- Retail
- Museums and Exhibitions
- Yachting
- Theme Parks

- COLORS
- Black
- White
- Custom RAL
- FINISHES
- 24K Gold
- Antique Gold
- Polished
- Brushed





SPEAKERS



Theaters



Auditoriums and Concert Halls



Houses of Worship



Broadcast and Studios



Boardrooms and Conference Rooms

Turtle

Low-profile, variable coverage stainless steel speaker



Turtle-KRM33P

General	
Type	Point source
Transducers	3 x 3.15" neodymium magnet woofer 1 x 6" passive radiator
Frequency Response	70 Hz - 20 kHz (-6 dB)
Max SPL	121 dB (peak)
Rated Power	300 W
Coverage	V. 90° H. 30° - 70° selectable
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω
Amp Module	
Output Power	
Handling & Finishes	
Dimensions (WxHxD)	266 x 103 x 302 mm (10.5 x 4.1 x 11.9 in)
Weight	5.2 kg (11.59 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
IP Rating	IP64



Turtle-KRM33

General	
Type	Point source
Transducers	3 x 3.15" neodymium magnet woofer 1 x 6" passive radiator
Frequency Response	70 Hz - 20 kHz (-6 dB)
Max SPL	121 dB (peak)
Rated Power	-
Coverage	V. 90° H. 30° - 70° selectable
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω
Amp Module	2 ch. switch-mode, class D
Output Power	2 x 125 W @ 4 Ω
Handling & Finishes	
Dimensions (WxHxD)	266 x 103 x 302 mm (10.5 x 4.1 x 11.9 in)
Weight	5.2 kg (11.59 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
IP Rating	IP40



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

COLORS



Black



White



Custom RAL

discover more



Domino

Full-range, compact passive stainless steel speakers



SPEAKERS



Restaurants and Cafes



Hotels and Resorts



Theme Parks



Theaters




Museums and Exhibitions

Dominoes are the **only K-array's unique full-range speakers** that can be driven by any amplifier, making it the perfect solution for applications with subwoofer restrictions.



Domino-KF26 Domino-KFC26

General	
Type	Point source
Transducers	6" neodymium magnet woofer 2" neodymium magnet woofer 6" passive transducer
Frequency Response	KF26 50 Hz - 19 kHz (-6 dB) KFC26 50 Hz - 20 kHz (-6 dB)
Max SPL	115 dB (peak)
Rated Power	160 W
Coverage	KF26 V. 90° H. 90° KFC26 V. 140° H. 140°
Connectors	4PIN euroblock connector (included)
Nominal Impedance	KF26 8 Ω / 32 Ω KFC26 8 Ω
Sensitivity (1W,1m)	90 dB
Handling & Finishes	
Dimensions (WxHxD)	180 x 350 x 118 mm (7.1 x 13.8 x 4.6 in)
Weight	6.5 kg (14.3 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64




FLUSHED WALL MOUNT

The Domino can be easily flush mounted in wall thanks to the K-WF accessory (not included / not for KF212).



Domino-KF210

General	
Type	Point source
Transducers	10" neodymium magnet woofer 3" neodymium magnet woofer 10" passive transducer
Frequency Response	40 Hz - 19 kHz (-6 dB) 123 dB (peak)
Max SPL	123 dB (peak)
Rated Power	320 W
Coverage	V. 90° H. 90°
Connectors	4PIN euroblock connector (included)
Nominal Impedance	4 Ω / 16 Ω
Sensitivity (1W,1m)	95 dB
Handling & Finishes	
Dimensions (WxHxD)	282 x 500 x 151 mm (11.1 x 19.7 x 5.9 in)
Weight	12 kg (26.5 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64

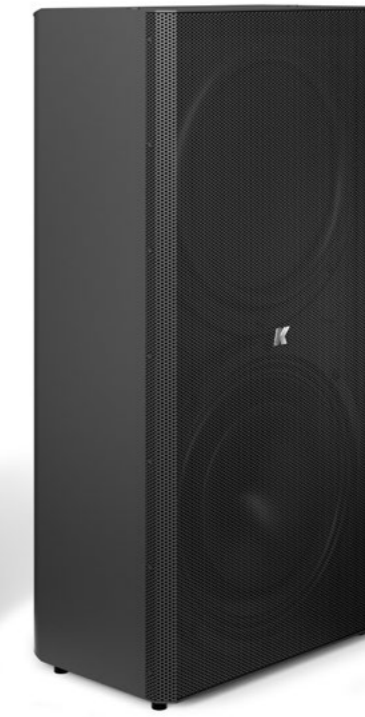

Domino-KF212

General	
Type	Point source
Transducers	Coax. 12" woofer 1.7" compression driver 12" passive transducer
Frequency Response	40 Hz - 19 kHz (-6 dB) 130 dB (peak)
Max SPL	130 dB (peak)
Rated Power	700 W
Coverage	V. 60° H. 90°
Connectors	4PIN euroblock connector (included)
Nominal Impedance	8 Ω
Sensitivity (1W,1m)	100 dB
Handling & Finishes	
Dimensions (WxHxD)	330 x 655 x 200 mm (13.0 x 25.8 x 7.9 in)
Weight	23.5 kg (51.8 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP43

COLORS



Black



White



Custom RAL



24K Gold



Antique Gold



Polished



Brushed

discover more



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Rumble

Stainless steel passive subwoofers

Extremely compact, then powerful bass systems engineered for maximum linear excursion and minimum residual noise that boast extended low frequency response.

SUBWOOFERS

- Restaurants and Cafes
- Hotels and Resorts
- Theme Parks
- Retail
- Broadcast and Studios
- Museums and Exhibitions



Rumble-KU44

Rumble-KU44-2

Rumble-KU26

Rumble-KU210

General	
Type	Passive subwoofer
Transducers	2 x 4" neodymium magnet woofers 2 x 4" passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	116 dB (peak)
Rated Power	120 W
Coverage	Omni
Connectors	4PIN euroblock connector (included)
Nominal Impedance	8 Ω / 32 Ω selectable KU44-2 2 Ω
Handling & Finishes	
Dimensions (WxHxD)	500 x 116 x 100 mm (19.7 x 4.6 x 4.0 in)
Weight	5.9 kg (13.0 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64


General	
Type	Passive subwoofer
Transducers	6" neodymium magnet woofers 6" passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	121 dB (peak)
Rated Power	160 W
Coverage	Omni
Connectors	4PIN euroblock connector (included)
Nominal Impedance	8 Ω / 32 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	350 x 180 x 118 mm (13.8 x 7.1 x 4.6 in)
Weight	5.9 kg (13.0 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64

General	
Type	Passive subwoofer
Transducers	10" neodymium magnet woofer 10" passive radiator
Frequency Response	40 Hz - 150 Hz (-6 dB)
Max SPL	127 dB (peak)
Rated Power	320 W
Coverage	Omni
Connectors	4PIN euroblock connector (included)
Nominal Impedance	4 Ω / 16 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	500 x 282 x 151 mm (19.7 x 11.1 x 5.9 in)
Weight	11 kg (24.3 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64

- COLOURS
- Black
- White
- Custom RAL
- FINISHES
- 24K Gold
- Antique Gold
- Polished
- Brushed



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com




FLUSHED WALL MOUNT

The Rumble can be easily flush mounted into the wall thanks to the K-WF accessory (not included / not for KU212).

Rumble

Stainless steel line array subwoofers



Rumble-KU212

General	
Type	Passive subwoofer
Transducers	12" neodymium magnet woofer 12" passive radiator
Frequency Response	35 Hz - 150 Hz (-6 dB)
Max SPL	130 dB (peak)
Rated Power	700 W
Coverage	Omni
Connectors	4PIN euroblock connector (included)
Nominal Impedance	4 Ω / 16 Ω selectable
Handling & Finishes	
Dimensions (WxHxD)	655x330x200 mm (25.8x13.0x7.9 in)
Weight	18.5 kg (40.8 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64



Rumble-KU315M

new product 2023

General	
Type	Passive subwoofer
Transducers	15" neodymium magnet woofer 2x 15" passive radiator
Frequency Response	35 Hz - 150 Hz (-6 dB)
Max SPL	137 dB (peak)
Rated Power	2000 W
Coverage	Omni
Connectors	2x SpeakON NL4 1+ 1- pass thru 2+ 2- signal
Nominal Impedance	4 Ω
Handling & Finishes	
Dimensions (WxHxD)	1230 x 450 x 250 mm (48.43 x 17.72 x 9.84 in)
Weight	40 kg (88.8 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
Finishes	-
IP Rating	-



K-IP65KITA (included)



K-IP65KITB (included)

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

- COLOURS
- Black
- White
- Custom RAL
- FINISHES
- 24K Gold
- Antique Gold
- Polished
- Brushed



discover more



Truffle

Extremely compact and easily concealable aluminum alloy subwoofers

The ultra-compact low frequency speaker line is comprised of **an active driver and a passive radiator on each end of a compact cylindrical box**, making the subwoofer a perfect omnidirectional low-end source.

SUBWOOFERS



Restaurants and Cafes



Hotels and Resorts



Fitness and Wellness



Retail



Museums and Exhibitions



Boardrooms and Conference Rooms



Truffle-KTR24

General	
Type	Passive subwoofer
Transducers	4" woofer + passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	112 dB (peak)
Rated Power	60 W
Coverage	Omni
Connectors	2PIN euroblock connector (included)
Nominal Impedance	4 Ω

Truffle-KTR25

Type	Passive subwoofer
Transducers	5.25" woofer + passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	115 dB (peak)
Rated Power	80 W
Coverage	Omni
Connectors	2PIN euroblock connector (included)
Nominal Impedance	4 Ω

Truffle-KTR26

Type	Passive subwoofer
Transducers	6.5" woofer + passive radiator
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB)
Max SPL	120 dB (peak)
Rated Power	100 W
Coverage	Omni
Connectors	2PIN euroblock connector (included)
Nominal Impedance	2 Ω

Handling & Finishes

Dimensions (WxHxD)	122 x 117 x 199 mm (4.8 x 4.6 x 7.8 in)
Weight	1.5 kg (3.31 lb)
Material	Aluminum
Colors	Black
Finishes	Powder Matte
IP Rating	IP64


Dimensions (WxHxD)	152 x 147 x 258 mm (6.0 x 5.8 x 10.2 in)
Weight	2.5 kg (5.51 lb)
Material	Aluminum
Colors	Black
Finishes	Powder Matte
IP Rating	IP64

Dimensions (WxHxD)	182 x 176 x 341 mm (7.1 x 6.9 x 13.4 in)
Weight	3.5 kg (7.72 lb)
Material	Aluminum
Colors	Black
Finishes	Powder Matte
IP Rating	IP64

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com


Truffle

Extremely compact and easily concealable aluminum alloy subwoofers



discover more





Kommander

All-in-one stainless steel amplifiers and processing solutions



discover more

Process and manage your sound



Integrated Electronic Brain

POWERED BY INTELLIGENCE Ultimate Electronic Power Control

Enhanced performance and easy tuning are now managed by the Integrated Electronic Brain - IEB - implemented into K-array amplifiers. More than a traditional DSP, the built-in micro electronics driven by the integrated operating system osKar features expansive sound processing, offering complete user control over the system performance: Volumes, Signal Routing and Presets complete with a USB player. Directly manageable using WiFi or Ethernet connectivity via mobile app and dedicated professional interface.



Versatile units with 4 to 8 independent output/input channels,



fully configurable thanks to the integrated DSP that offers control over the equalization and level of each channel, routing matrix and delay, making the adoption of signal processors unnecessary.



Volumes, Signal Routing, Delays, Presets as well as a complete USB player, are directly manageable through three different types of software and dedicated professional interface.



Plugins available for



Kommander-KA02 I




General


Type	4ch switching mode, Class D Amplifier
Output Power	4x 50W @ 4Ω
Impedance	minimum 4 Ω (2 Ω PBTl)
Frequency Response	20 Hz - 20 kHz (±1 dB)
Connections	3.5 mm jack unBAL analog stereo input, 4x BAL input: Phoenix MC 1.5/ 3-ST-3.81, TOSLINK optical input, 4x USB-A 2.0, 1x RJ45 Ethernet, Bluetooth 4.1 Low Energy Wi-Fi IEEE 802.11 b/g/n
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	Dedicated AC/DC power adapter 100-240V ~ AC, 50-60 Hz input / 24 V, 4 A DC output
Power Consumption	20 W @ 4Ω load, 1/8 Rated Power (Pink Noise)

Handling & Finishes

Color	Black
Material	Aluminum
IP Rating	IP20
Dimensions (WxHxD)	219 x 45,5 x 170 mm (8.6 x 1.8 x 6.7 in)
Weight	0.7 kg (1.5 lb)



AMPLIFIERS



Kommander-KA04



General


Type	4ch switching mode, Class D Amplifier
Output Power	4x 150W @ 4Ω
Impedance	minimum 4 Ω (2 Ω PBTl)
Frequency Response	20 Hz - 20 kHz (±1 dB)
Connections	3.5 mm jack unBAL analog stereo input, 4x BAL input: Phoenix MC 1.5/ 3-ST-3.81, TOSLINK optical input, 4x USB-A 2.0, 1x RJ45 Ethernet, Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	400 W @ 4Ω load, Pink noise, 1/8 rated power

Handling & Finishes

Color	Black
Material	Aluminum
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	6 kg (13,2 lb)


The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com





Kommander

All-in-one stainless steel amplifiers and processing solutions



Kommander-KA14 I

General	
Type	4ch switching mode, Class D Amplifier
Output Power	4x 600W @ 2Ω
Impedance	minimum 2 Ω
Frequency Response	20 Hz – 20 kHz (±1 dB)
Connections	Input: 4x XLR-F bal input 4x XLR-M bal LINK output Output: 2x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	400 W @ 4 Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	6 kg (13,2 lb)



Kommander-KA18

General	
Type	8ch switching mode, Class D Amplifier
Output Power	8 x 150W @ 4Ω
Impedance	minimum 4 Ω
Frequency Response	20 Hz – 20 kHz (±1 dB)
Connections	Input: 8x XLR-F bal input Output: 4x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	400 W @ 4 Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	7 kg (15,4 lb)



Kommander-KA28

General	
Type	8ch switching mode, Class D Amplifier
Output Power	8 x 600W @ 2Ω
Impedance	minimum 2 Ω
Frequency Response	20 Hz – 20 kHz (±1 dB)
Connections	Input: 8x XLR-F bal input Output: 4x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	800 W @ 4 Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	7,4 kg (16,3 lb)




Kommander-KA34

General	
Type	4ch switching mode, Class D Amplifier
Output Power	4 x 750W @ 4Ω
Impedance	minimum 4 Ω
Frequency Response	20 Hz – 20 kHz (±1 dB)
Connections	Input: 4x XLR-F bal input 4x XLR-M bal LINK output Output: 2x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Input EQ, Output EQ, Signal Routing, Level adjustment, Dynamic Limiters, Delay
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	600 W @ 4 Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	7 kg (15,4 lb)

AMPLIFIERS

- Restaurants and Cafes
- Boardrooms and Conference Rooms
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship



Kommander

All-in-one stainless steel amplifiers and processing solutions

AMPLIFIERS


- Restaurants and Cafes
- Boardrooms and Conference Rooms
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com


The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com






Kommander

All-in-one stainless steel amplifiers and processing solutions



Kommander-KA68

General	
Type	8ch switching mode, Class D Amplifier
Output Power	8 x 750W @ 4Ω
Impedance	minimum 4 Ω
Frequency Response	20 Hz - 20 kHz (±1 dB)
Connections	Input: 8x XLR-F bal input Output: 4x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	1200 W @ 4Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	8,3 kg (18,3 lb)



Kommander-KA104

General	
Type	4ch switching mode, Class D Amplifier
Output Power	4 x 2500W @ 4Ω
Impedance	minimum 4 Ω (2 Ω tolerant)
Frequency Response	20 Hz - 20 kHz (±1 dB)
Connections	Input: 4x XLR-F bal input 4x XLR-M bal LINK output Output: 2x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	600 W @ 4Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	8,15 kg (18 lb)

Kommander

All-in-one stainless steel amplifiers and processing solutions



Kommander-KA208

General	
Type	8ch switching mode, Class D Amplifier
Output Power	8 x 2500W @ 4Ω
Impedance	minimum 4 Ω (2 Ω tolerant)
Frequency Response	20 Hz - 20 kHz (±1 dB)
Connections	Input: 8x XLR-F bal input Output: 4x PC 4/ 4-ST-7,62 speaker output Remote connectivity: 1x Ethernet RJ45 4x USB-A Wi-Fi IEEE 802.11 b/g/n Power: 1 x PowerCon TRUE IN 1 x PowerCon TRUE Link
Built-in DSP	Grouping, Equalization, Limiters, Routing, Level, Loudspeaker presets
Remote control	Wi-Fi and Ethernet dedicated APP and Desktop software
Protections	Thermal protection, output short circuit, RMS output current protection, high frequency protection, power limiter, clip limiter.
MAINS Operating Range	100-240V AC, 50-60 Hz with PFC
Power Consumption	1200 W @ 4Ω load, Pink noise, 1/8 rated power
Handling & Finishes	
Color	Black
Material	Stainless Steel
IP Rating	IP20
Dimensions (WxHxD)	430 x 87 x 430 mm (17 x 3,4 x 17 in)
Weight	10 kg (22 lb)



AMPLIFIERS

- Restaurants and Cafes
- Boardrooms and Conference Rooms
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship

AMPLIFIERS


- Restaurants and Cafes
- Boardrooms and Conference Rooms
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com




The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



K-framework 3

SOFTWARE

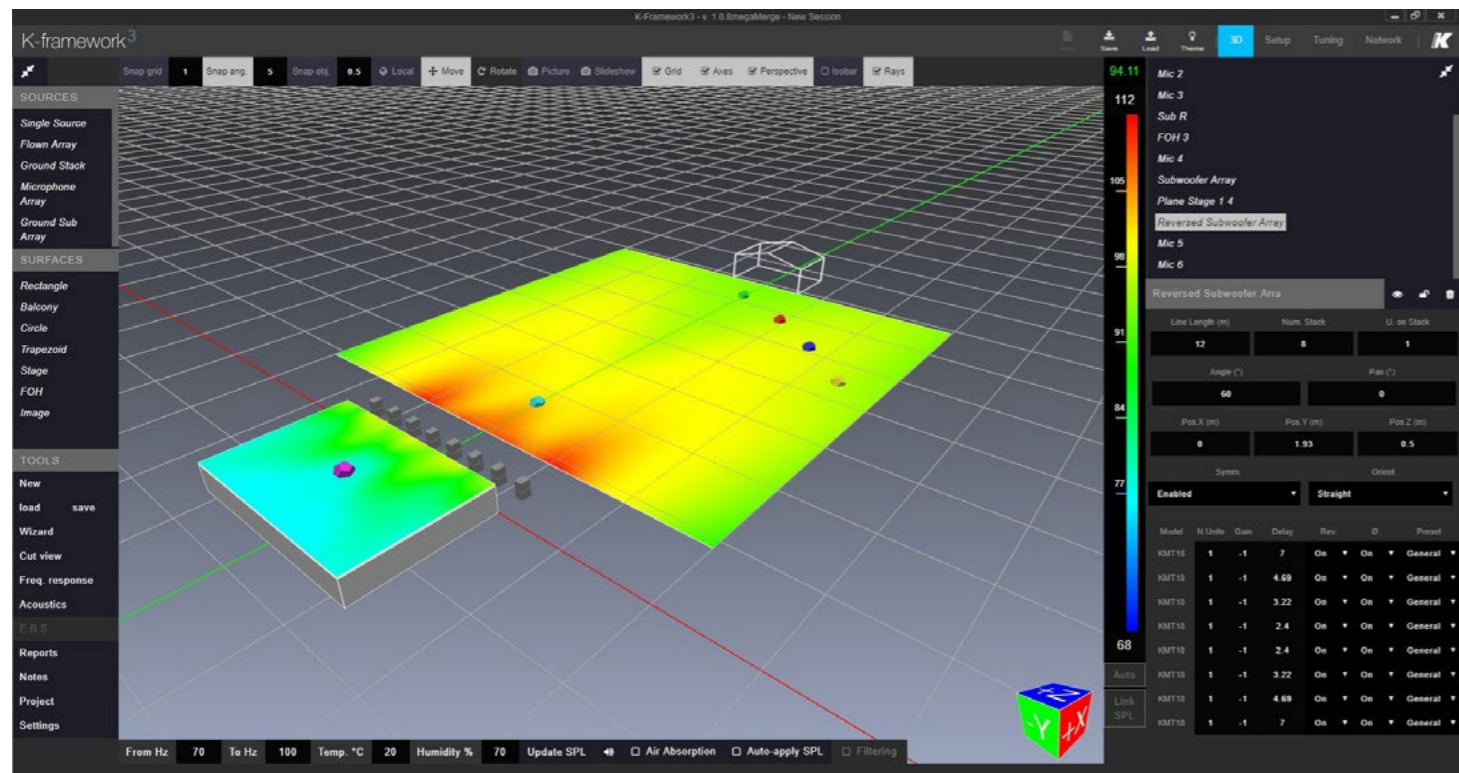


K-FRAMEWORK3



Available for both Windows and Mac users, the K-framework 3 is K-array's proprietary 3D acoustical simulation and remote control software. In one single software you can design, simulate, configure, tune and manage K-array speakers, subwoofers, amplifiers and microphones. Data can be transferred from the 3D acoustical simulation environment to the connected devices in one click, while advanced monitoring tools will assist the operator during the entire show. Download the K-framework 3 software from the K-array website, and don't miss the complete video tutorial available on the K-academy page.



K-ARRAY Connect




SOFTWARE

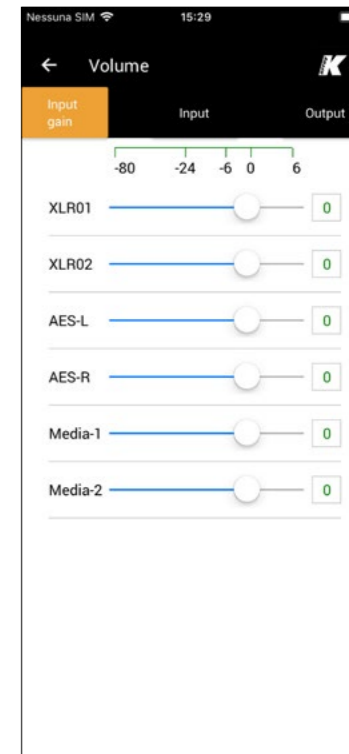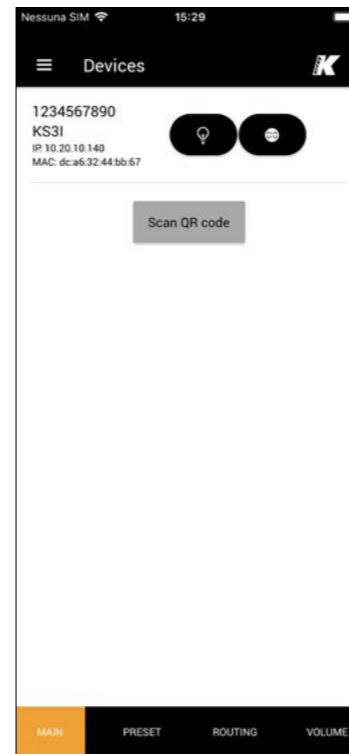

K-ARRAY CONNECT

Available for both Android and iOS devices, The K-array Connect mobile is the easiest and quickest way to program and control K-array devices. Scan the QR code available on the amplifier back panel to automatically connect your phone to the built-in Wi-Fi, load the proper preset, select the signal routing and adjust the volume..the amplifier is ready to play! For more advanced settings, including equalization, delay, internal player management and much more, a Web Application and the K-framework 3 desktop software are available. Controlling an amplifier has never been easier.






LIVE PRO SOUND

Managing the sound efficiently, setting up and dismantling heavy equipment not fit for purpose, getting very little sleep on the road and putting thousands of kilometres on the clock. That is why we consciously decided to develop unparalleled premium speakers that made life easier while putting a smile on the face of those who love and appreciate excellent sound.

Technologies

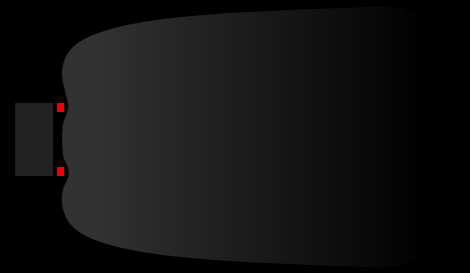

Slim Array Technology

Practicality in transporting, ease of assembly and cost savings aren't the only benefits of K-array's unique technology, Slim Array Technology (SAT).


One of the biggest advantages of SAT line arrays is that they show a cardioid dispersion pattern in the mid-low range, where conventional line arrays are almost omnidirectional. This reduces the amount of energy sent towards the stage which typically requires a high volume level of the monitors for the musicians even though it consequently deteriorates the signal-to-noise ratio of the microphones and increases the difficulty in feedback management.

Another advantage of SAT is a better impulse response than that of a conventional line array element. In truth, a directly-radiating bass reflex box uses a resonant air volume that tends to reduce the definition in the low-mid range and does not allow the correct reproduction of fast transients.

Family Products	Pag
Mugello	80
Firenze	88

Instead, SAT's compact design allows sound to exit instantaneously without resonance, generating a significant amount of sound pressure in the low and low-mid range with a fast transient response. The cardioid dispersion in the low frequencies and an extremely fast impulse response are the true advantages of slim array speakers. The combination of these two factors leads to a significantly better acoustic outcome with respect to the traditional line array elements, particularly in terms of sound definition and noise pollution outside the desired audience areas.

Additionally, the compactness of the speakers benefits the user through the practicality in transporting, the ease of assembly and the overall minimal footprint of the cluster which creates an optimization of space, time and, therefore, total incurred costs for the management of these systems.

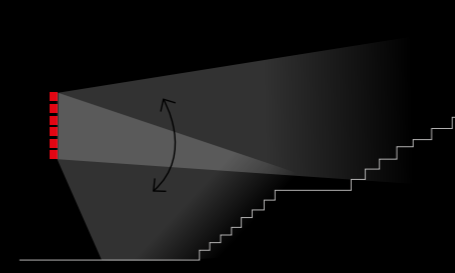


Electronic Beam Steering

Composed of closely-spaced, full-range sound sources, all our line array elements feature our innovative Pure Array Technology (PAT). With no drivers dedicated to the high frequencies, no bass reflex or passive radiators dedicated to the low end, there are no crossover points and a perfect phase response is achieved in both the near and far fields.

All the sound sources in the array are identical and perfectly coupled producing a true line array with benefit of having the sound beam radiated by the column very wide on the horizontal plane and very narrow on the vertical plane. The amount of energy sent towards the ceiling



Family Products	Pag
Firenze	88

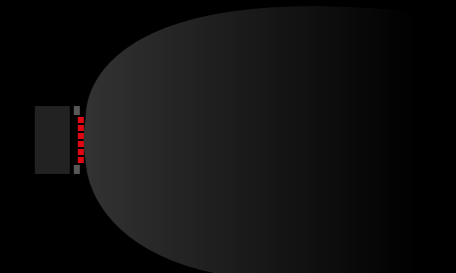


Advanced Bass Control

It's well known that a good perception of the low frequencies during a live event is the key for a great musical experience.

Our new approach to the design of concert sound systems, guarantees an optimal control of the bass distribution over the audience areas, minimizing the SPL variations in the very critical octave 60-120 Hz.



Family Products	Pag
Pinnacle	56
Thunder	72
Firenze	88



Dragon

12" coaxial passive stainless steel array element

The Dragon is a **powerful point source that can provide high pressure** when needed in the near field with a rapid depreciation once distanced from the source, to become one of the most useful tools for an installer.

SPEAKERS


Large Congregations

Stadiums and Sport Venues

Nightclubs and Lounges

Broadcast and Studios

Theme Parks

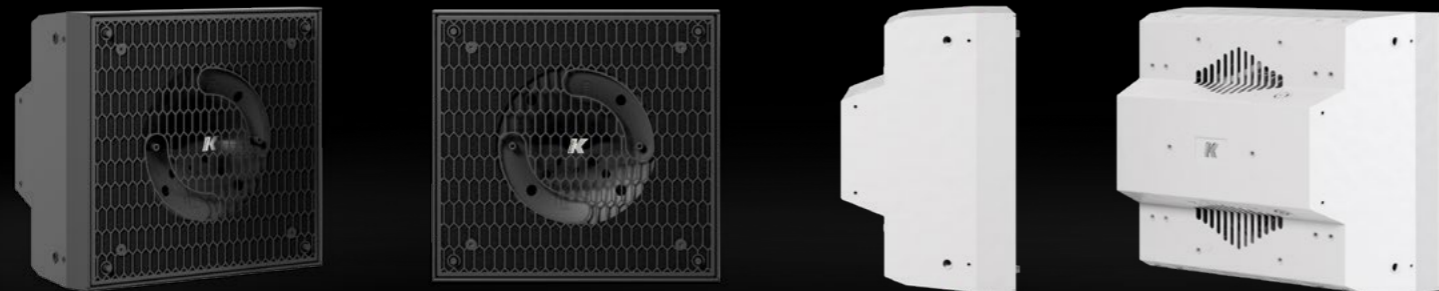

Dragon-KX12

General

Type	Point source
Transducers	Coaxial 12" woofer + 2.4" compression driver
Frequency Response	120 Hz - 19 kHz (-6 dB)
Max SPL	133 dB (peak)
Rated Power	1200 W
Coverage	User sel. V./H. 30°/100° 100°/30°
Connectors	2 x SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω

Handling & Finishes

Dimensions (WxHxD)	340 x 320 x 201 mm (13.4 x 12.6 x 7.9 in)
Weight	12.2 kg (26.89 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
IP Rating	IP21


COLORS
Black
White
Custom RAL



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com


Dragon

12" coaxial passive stainless steel array element



discover more









Pinnacle

High-tech, lightweight powered stereo systems



The Pinnacle Series are versatile loudspeaker systems that expand upon their portable capabilities. The systems have dedicated accessories which permit a hanging configuration and encourage the possibility of joining other PAT columns to create longer arrays.

watch the video

MODULAR SETUP CAPABILITIES



Plugins available for



Pinnacle-KR2

Pinnacle-KR102 II

Pinnacle-KR202 II

Pinnacle-KR204 II

Pinnacle-KR3

Pinnacle-KR402 II

Pinnacle-KR404 II


Pinnacle-KR4

Pinnacle-KR802 II

Pinnacle-KR804 II

discover more





Pinnacle-KR2

High-tech, lightweight powered stereo systems

Pinnacle-KR102 II

- 2x **Kobra-KK102 I**
- 1x **Thunder-KS1 I**
- 1x **Thunder-KS1P I**
- 2x **K-KKPOLE**
- 2x **K-JOINT3**
- 2x **K-FOOT3**

SYSTEMS



Speakers



Kobra-KK102 I

General	
Type	Line array
Transducers	16 x 2" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	126 dB (peak)
Rated Power	400 W
Coverage	V. 7° - 35° H. 120°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	59 x 1000 x 81 mm (2.3 x 39.4 x 3.2 in)
Weight	4.8 kg (10.6 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

Subwoofer



Thunder-KS1 I



Thunder-KS1P I

Thunder-KS1 I

General	
Type	Active subwoofer
Transducers	12" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	134
Rated Power	1200W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	8ohm subwoofer

Thunder-KS1P I

General	
Type	Passive subwoofer
Transducers	12" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 450 Hz, preset dependant
Max SPL	134
Rated Power	1200W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	8ohm

Accessories Included



K-JOINT3



K-FOOT3



K-KKPOLE

Handling & Finishes	
Dimensions (WxHxD)	500 x 350 x 440 mm (19.7 x 13.8 x 17.3 in)
Weight	21.6 kg (47.62 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power

Handling & Finishes	
Dimensions (WxHxD)	500 x 350 x 440 mm (19.7 x 13.8 x 17.3 in)
Weight	18 kg (39.7 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

COLORS



Black



White



Custom RAL

FINISHES



24K Gold



Antique Gold



Polished



Brushed



Pinnacle-KR2

High-tech, lightweight powered stereo systems

Pinnacle-KR102 II

- 2x **Kobra-KK102 I**
- 1x **Thunder-KS1 I**
- 1x **Thunder-KS1P I**
- 2x **K-KKPOLE**
- 2x **K-JOINT3**
- 2x **K-FOOT3**


SYSTEMS



discover more



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Pinnacle-KR2

High-tech, lightweight powered stereo systems

Pinnacle-KR202 II

- 4 x **Kobra-KK102 I**
- 1 x **Thunder-KS2 I**
- 1 x **Thunder-KS2P I**
- 4 x **K-JOINT3**
- 2 x **K-FOOT3**

SYSTEMS



Speakers



Kobra-KK102 I

General

Type	Line array
Transducers	16 x 2" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	126 dB (peak)
Rated Power	400 W
Coverage	V. 7° - 35° H. 120°
Connectors	SpeakOn NL4 1+1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes

Dimensions (WxHxD)	59 x 1000 x 81 mm (2.3 x 39.4 x 3.2 in)
Weight	4.8 kg (10.6 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

Subwoofer



Thunder-KS2 I



Thunder-KS2P I

Thunder-KS2 I

General

Type	Active subwoofer
Transducers	18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	137
Rated Power	1400W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	8ohm subwoofer

Thunder-KS2P I

General

Type	Passive subwoofer
Transducers	18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 450 Hz, preset dependant
Max SPL	137
Rated Power	1400W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	8ohm

Accessories Included



K-JOINT3

K-FOOT3

Handling & Finishes

Dimensions (WxHxD)	650 x 500 x 580 mm (25.6 x 19.7 x 22.8 in)
Weight	37,6 kg (82.9 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power

Handling & Finishes

Dimensions (WxHxD)	650 x 500 x 580 mm (25.6 x 19.7 x 22.8 in)
Weight	34 kg (75 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

COLORS

- Black
- White
- Custom RAL


FINISHES

- 24K Gold
- Antique Gold
- Polished
- Brushed



Pinnacle-KR2


High-tech, lightweight powered stereo systems



Pinnacle-KR202 II

- 4 x **Kobra-KK102 I**
- 1 x **Thunder-KS2 I**
- 1 x **Thunder-KS2P I**
- 4 x **K-JOINT3**
- 2 x **K-FOOT3**

SYSTEMS

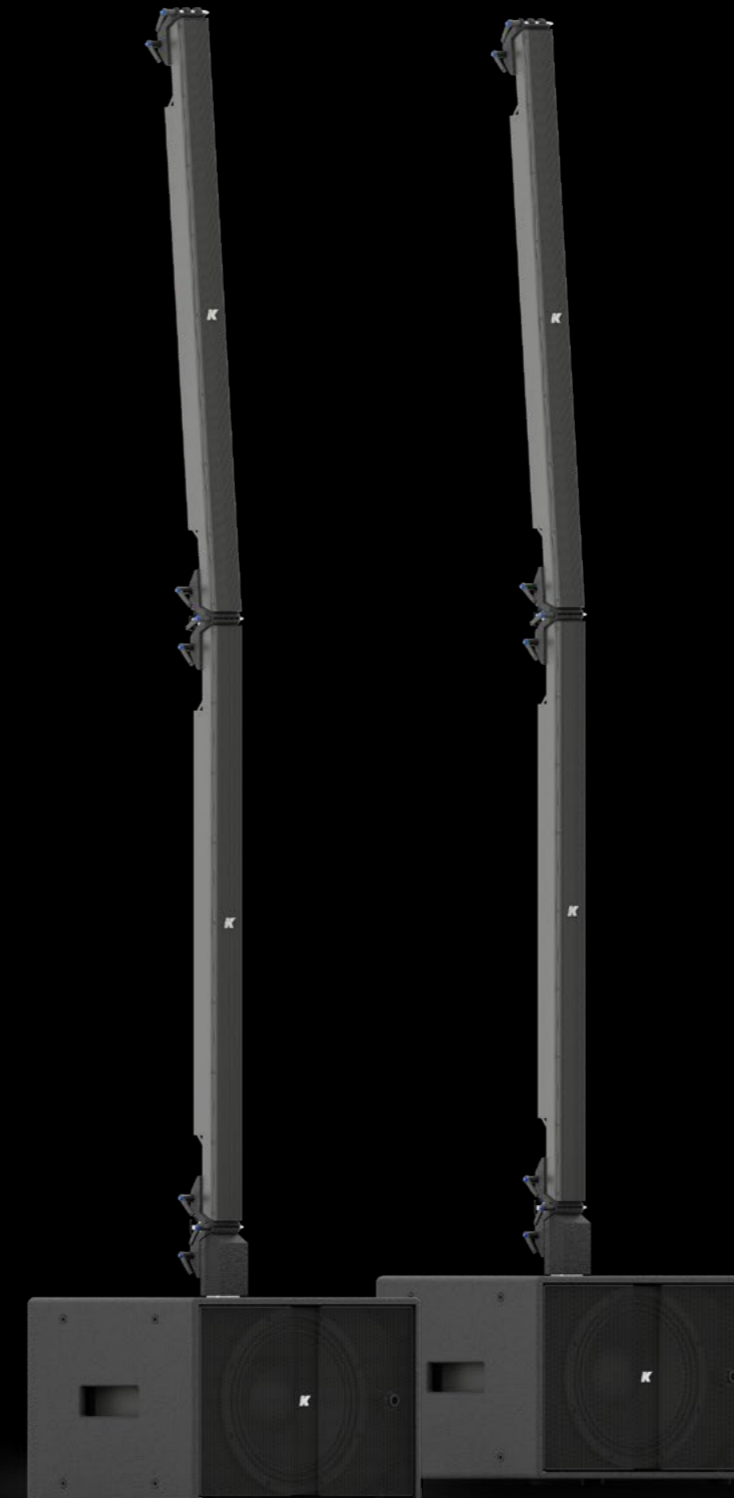


CONFIGURATION



discover more



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Pinnacle-KR2

High-tech, lightweight powered stereo systems

Pinnacle-KR204 II

- 8 x **Kobra-KK102 I**
- 2 x **Thunder-KS2 I**
- 2 x **Thunder-KS2P I**
- 2 x **Flybar**
- 8 x **K-JOINT3**
- 4 x **K-FOOT3**

SYSTEMS



Speakers



Kobra-KK102 I

General

Type	Line array
Transducers	16 x 2" neodymium magnet woofers
Frequency Response	150 Hz - 18 kHz (-6 dB)
Max SPL	126 dB (peak)
Rated Power	400 W
Coverage	V. 7° - 35° H. 120°
Connectors	SpeakOn NL4 1+1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes

Dimensions (WxHxD)	59 x 1000 x 81 mm (2.3 x 39.4 x 3.2 in)
Weight	4.8 kg (10.6 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

Subwoofer



Thunder-KS2 I



Thunder-KS2P I

Thunder-KS2 I

General

Type	Active subwoofer
Transducers	18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	137
Rated Power	1400W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains power CON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	8ohm subwoofer

Thunder-KS2P I

General

Type	Passive subwoofer
Transducers	18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 450 Hz, preset dependant
Max SPL	137
Rated Power	1400W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	8ohm

Accessories Included



K-JOINT3



K-FOOT3



FLYBAR

COLORS

- Black
- White
- Custom RAL

FINISHES

- 24K Gold
- Antique Gold
- Polished
- Brushed



Pinnacle-KR2

High-tech, lightweight powered stereo systems





Pinnacle-KR204 II

- 8 x **Kobra-KK102 I**
- 2 x **Thunder-KS2 I**
- 2 x **Thunder-KS2P I**
- 2 x **Flybar**
- 8 x **K-JOINT3**
- 2 x **K-FOOT3**


SYSTEMS



CONFIGURATION

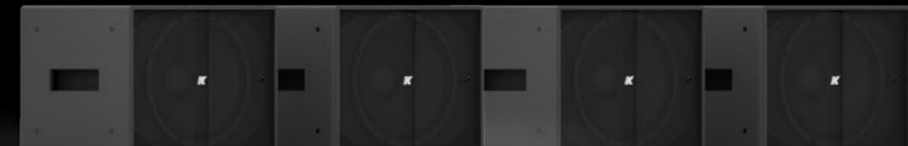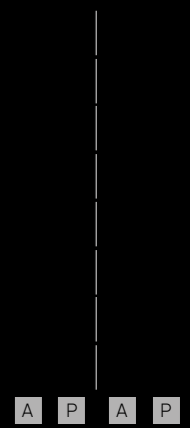

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Pinnacle-KR3

High-tech, lightweight powered stereo systems

Pinnacle-KR402 II

- 4 x **Python-KP102 I**
- 1 x **Thunder-KS3 I**
- 1 x **Thunder-KS3P I**
- 4 x **K-JOINT3**
- 2 x **K-FOOT3**

SYSTEMS

- Event Productions
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship
- Concerts and Live Events

Speakers



Python-KP102 I

General	
Type	Line array
Transducers	12 x 3.15" neodymium magnet woofers
Frequency Response	120 Hz - 18 kHz (-6 dB)
Max SPL	134 dB (peak)
Rated Power	720 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	4 Ω / 16 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	89 x 1000 x 118 mm (3.5 x 39.4 x 4.7 in)
Weight	12.0 kg (26.5 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

Subwoofer



Thunder-KS3 I



Thunder-KS3P I

Thunder-KS3 I

General	
Type	Active subwoofer
Transducers	21" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	139
Rated Power	2800W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	4ohm subwoofer

Thunder-KS3P I

General	
Type	Passive subwoofer
Transducers	21" neodymium magnet woofer
Frequency Response	35 Hz - 150/300 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	139
Rated Power	2800W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	4ohm

Accessories Included



K-JOINT3



K-FOOT3

Handling & Finishes	
Dimensions (WxHxD)	735 x 580 x 700 mm (28.9 x 22.83 x 27.55 in)
Weight	56 kg (123.4 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power

Handling & Finishes	
Dimensions (WxHxD)	735 x 580 x 700 mm (28.9 x 22.83 x 27.55 in)
Weight	49.2 kg (108.5 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

- COLORS
- Black
 - White
 - Custom RAL
- FINISHES
- 24K Gold
 - Antique Gold
 - Polished
 - Brushed



Pinnacle-KR3

High-tech, lightweight powered stereo systems

Pinnacle-KR402 II

- 4 x **Python-KP102 I**
- 1 x **Thunder-KS3 I**
- 1 x **Thunder-KS3P I**
- 4 x **K-JOINT3**
- 2 x **K-FOOT3**

SYSTEMS

- Event Productions
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship
- Concerts and Live Events




CONFIGURATION



discover more



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Pinnacle-KR3

High-tech, lightweight powered stereo systems

Pinnacle-KR404 II

- 8 x **Python-KP102 I**
- 2 x **Thunder-KS3 I**
- 2 x **Thunder-KS3P I**
- 2 x **Flybar**
- 8 x **K-JOINT3**
- 4 x **K-FOOT3**

SYSTEMS

- Event Productions
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship
- Concerts and Live Events

Speakers



Python-KP102 I

General	
Type	Line array
Transducers	12 x 3.15" neodymium magnet woofers
Frequency Response	120 Hz - 18 kHz (-6 dB)
Max SPL	134 dB (peak)
Rated Power	720 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	4 Ω / 16 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	89 x 1000 x 118 mm (3.5 x 39.4 x 4.7 in)
Weight	12.0 kg (26.5 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64
EN54-24	EN 54-24:2008 compliant

Subwoofer



Thunder-KS3 I



Thunder-KS3P I

Thunder-KS3 I

General	
Type	Active subwoofer
Transducers	21" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	139
Rated Power	2800W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	4ohm subwoofer

Thunder-KS3P I

General	
Type	Passive subwoofer
Transducers	21" neodymium magnet woofer
Frequency Response	35 Hz - 150/300 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	139
Rated Power	2800W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	4ohm

Accessories Included



K-JOINT3



K-FOOT3

Handling & Finishes	
Dimensions (WxHxD)	735 x 580 x 700 mm (28.9 x 22.83 x 27.55 in)
Weight	56 kg (123.4 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power

Handling & Finishes	
Dimensions (WxHxD)	735 x 580 x 700 mm (28.9 x 22.83 x 27.55 in)
Weight	49.2 kg (108.5 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54



FLYBAR

- COLORS
- Black
 - White
 - Custom RAL
- FINISHES
- 24K Gold
 - Antique Gold
 - Polished
 - Brushed



Pinnacle-KR3

High-tech, lightweight powered stereo systems





Pinnacle-KR404 II

- 8 x **Python-KP102 I**
- 2 x **Thunder-KS3 I**
- 2 x **Thunder-KS3P I**
- 2 x **Flybar**
- 8 x **K-JOINT3**
- 2 x **K-FOOT3**


SYSTEMS

- Event Productions
- Theaters
- Auditoriums and Concert Halls
- Houses of Worship
- Concerts and Live Events

CONFIGURATION



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Pinnacle-KR4

High-tech, lightweight powered stereo systems

Pinnacle-KR802 II

- 4 x **Kayman-KV102**
- 1 x **Thunder-KS4 I**
- 1 x **Thunder-KS4P I**
- 4 x **K-JOINT3**
- 2 x **K-FOOT3**

SYSTEMS



Speakers



Kayman-KV102

General	
Type	Line array
Transducers	8 x 4" neodymium magnet woofers
Frequency Response	120 Hz - 20 kHz (-6 dB)
Max SPL	138 dB (peak)
Rated Power	1200 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	116 x 1000 x 134 mm (4.6 x 39.4 x 5.3 in)
Weight	14.9 kg (32.8 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64

Subwoofer



Thunder-KS4 I

Thunder-KS4 I

General	
Type	Active subwoofer
Transducers	2 x 18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	141
Rated Power	2800W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	4ohm subwoofer

Thunder-KS4P I

General	
Type	Passive subwoofer
Transducers	2 x 18" neodymium magnet woofer
Frequency Response	35 Hz - 150/300 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	141
Rated Power	2800W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	4ohm



Thunder-KS4P I

Accessories Included




K-JOINT3



K-FOOT3

Handling & Finishes	
Dimensions (WxHxD)	1106 x 500 x 580 mm (43.5 x 19.7 x 22.8 in)
Weight	60 kg (132.3 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 2500W @ 4ohm
Power consumption	600 VA @ 8 Ω load, Pink noise, 1/8 rated power

Handling & Finishes	
Dimensions (WxHxD)	1106 x 500 x 580 mm (43.5 x 19.7 x 22.8 in)
Weight	53,2 kg (117.3 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54



Pinnacle-KR4

High-tech, lightweight powered stereo systems



Pinnacle-KR802 II

- 4 x **Kayman-KV102**
- 1 x **Thunder-KS4 I**
- 1 x **Thunder-KS4P I**
- 4 x **K-JOINT3**
- 2 x **K-FOOT3**

SYSTEMS




CONFIGURATION



discover more



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Pinnacle-KR4

High-tech, lightweight powered stereo systems

Pinnacle-KR804 II

- 8 x **Kayman-KV102**
- 2 x **Thunder-KS4 I**
- 2 x **Thunder-KS4P I**
- 2 x **Flybar**
- 8 x **K-JOINT3**
- 4 x **K-FOOT3**

SYSTEMS

Event Productions

Theaters

Auditoriums and Concert Halls

Houses of Worship

Concerts and Live Events

Speakers



Kayman-KV102

General	
Type	Line array
Transducers	8 x 4" neodymium magnet woofers
Frequency Response	120 Hz – 20 kHz (-6 dB)
Max SPL	138 dB (peak)
Rated Power	1200 W
Coverage	V. 7° - 30° H. 90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω / 32 Ω selectable

Handling & Finishes	
Dimensions (WxHxD)	116 x 1000 x 134 mm (4.6 x 39.4 x 5.3 in)
Weight	14.9 kg (32.8 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	24K Gold, Antique Gold, Polished, Brushed
IP Rating	IP64

Subwoofer



Thunder-KS4 I

Thunder-KS4 I

General	
Type	Active subwoofer
Transducers	2 x 18" neodymium magnet woofer
Frequency Response	35 Hz – 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant

Thunder-KS4P I

General	
Type	Passive subwoofer
Transducers	2 x 18" neodymium magnet woofer
Frequency Response	35 Hz – 150/300 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant



Thunder-KS4P I

Max SPL	141
Rated Power	2800W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains power CON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A
Nominal Impedance	4ohm subwoofer

Max SPL	141
Rated Power	2800W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	4ohm

Accessories Included



K-JOINT3

Handling & Finishes	
Dimensions (WxHxD)	1106 x 500 x 580 mm (43.5 x 19.7 x 22.8 in)
Weight	60 kg (132.3 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 2500W @ 4ohm
Power consumption	600 VA @ 8 Ω load, Pink noise, 1/8 rated power

Handling & Finishes	
Dimensions (WxHxD)	1106 x 500 x 580 mm (43.5 x 19.7 x 22.8 in)
Weight	53,2 kg (117.3 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54



K-FOOT3



FLYBAR

- COLORS
- Black
 - White
 - Custom RAL

- FINISHES
- 24K Gold
 - Antique Gold
 - Polished
 - Brushed




The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

Pinnacle-KR3

High-tech, lightweight powered stereo systems

Pinnacle-KR804 II

- 8 x **Kayman-KV102**
- 2 x **Thunder-KS4 I**
- 2 x **Thunder-KS4P I**
- 2 x **Flybar**
- 8 x **K-JOINT3**
- 2 x **K-FOOT3**



SYSTEMS

Event Productions





Theaters


Auditoriums and Concert Halls

Houses of Worship

Concerts and Live Events

CONFIGURATION





Thunder

Ultra-light, high power subwoofers

Combined with the unique audio solutions of K-array, add exceptional lows to your frequency range for live sound events with a choice of five subwoofer models from the Thunder series present in both active and passive electronic versions.



Advanced Bass Control



Integrated Electronic Brain



WI-FI



USB MULTIMEDIA PLAYER





ETHERNET



MQTT




Plugins available for



discover more





Thunder

Ultra-light, high power subwoofers

SUBWOOFERS

Event Productions


Theaters

Auditoriums and Concert Halls

Nightclubs and Lounges

Boardrooms and Conference Rooms

Concerts and Live Events



Thunder

Ultra-light, high power subwoofers

SUBWOOFERS

Event Productions

Theaters

Auditoriums and Concert Halls

Nightclubs and Lounges

Boardrooms and Conference Rooms

Concerts and Live Events

Thunder-KS1 I

General	
Type	Active subwoofer
Transducers	12" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	134 dB
Rated Power	1200W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains power CON TRUE TOP Networking and Data: 1x RJ45 4x USB-A

Handling & Finishes	
Dimensions (WxHxD)	500 x 350 x 440 mm (19.7 x 13.8 x 17.3 in)
Weight	21,6 kg (47.62 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power

Thunder-KS1P I

General	
Type	Passive subwoofer
Transducers	12" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 450 Hz, preset dependant
Max SPL	134 dB
Rated Power	1200W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	8ohm

Handling & Finishes	
Dimensions (WxHxD)	500 x 350 x 440 mm (19.7 x 13.8 x 17.3 in)
Weight	18 kg (39.7 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

Thunder-KS2 I

General	
Type	Active subwoofer
Transducers	18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	137 dB
Rated Power	1400W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains power CON TRUE TOP Networking and Data: 1x RJ45 4x USB-A


Handling & Finishes	
Dimensions (WxHxD)	650 x 500 x 580 mm (25.6 x 19.7 x 22.8 in)
Weight	37,6 kg (82.9 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power


Thunder-KS2P I

General	
Type	Passive subwoofer
Transducers	18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	External DSP-controlled, Low Pass @ 150 Hz up to 450 Hz, preset dependant
Max SPL	137 dB
Rated Power	1400W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	8ohm

Handling & Finishes	
Dimensions (WxHxD)	650 x 500 x 580 mm (25.6 x 19.7 x 22.8 in)
Weight	34 kg (75 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com





Thunder

Ultra-light, high power subwoofers

SUBWOOFERS

Event Productions


Theaters

Auditoriums and Concert Halls

Nightclubs and Lounges

Boardrooms and Conference Rooms

Concerts and Live Events

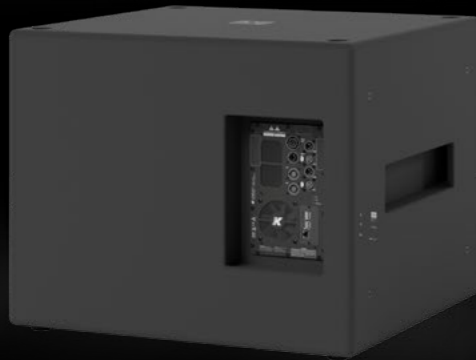


Thunder-KS3 I

General

Type	Active subwoofer
Transducers	21" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	139
Rated Power	2800W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains power: CON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A

Handling & Finishes

Dimensions (WxHxD)	735 x 580 x 700 mm (28.9 x 22.83 x 27.55 in)
Weight	56 kg (123.4 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 1500W @ 4ohm
Power consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power



Thunder-KS3P I

General

Type	Passive subwoofer
Transducers	21" neodymium magnet woofer
Frequency Response	35 Hz - 150/300 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	139
Rated Power	2800W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	4ohm


Handling & Finishes

Dimensions (WxHxD)	735 x 580 x 700 mm (28.9 x 22.83 x 27.55 in)
Weight	49,2 kg (108.5 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

Thunder

Ultra-light, high power subwoofers



SUBWOOFERS

Event Productions

Theaters

Auditoriums and Concert Halls

Nightclubs and Lounges

Boardrooms and Conference Rooms

Concerts and Live Events



Thunder-KS4 I

General

Type	Active subwoofer
Transducers	2 x 18" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	141
Rated Power	2800W peak
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains power: CON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A

Handling & Finishes

Dimensions (WxHxD)	1106 x 500 x 580 mm (43.5 x 19.7 x 22.8 in)
Weight	60 kg (132.3 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	4 x 2500W @ 4ohm
Power consumption	600 VA @ 8 Ω load, Pink noise, 1/8 rated power

Thunder-KS4P I

General


Type	Passive subwoofer
Transducers	2 x 18" neodymium magnet woofer
Frequency Response	35 Hz - 150/300 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	141
Rated Power	2800W peak
Coverage	Omni
Connectors	2 x Speakon NL4
Nominal Impedance	4ohm

Handling & Finishes

Dimensions (WxHxD)	1106 x 500 x 580 mm (43.5 x 19.7 x 22.8 in)
Weight	53,2 kg (117.3 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	54

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com





Thunder

Ultra-light, high power subwoofers

SUBWOOFERS

Event Productions



Theaters

Auditoriums and Concert Halls

Nightclubs and Lounges

Boardrooms and Conference Rooms

Concerts and Live Events

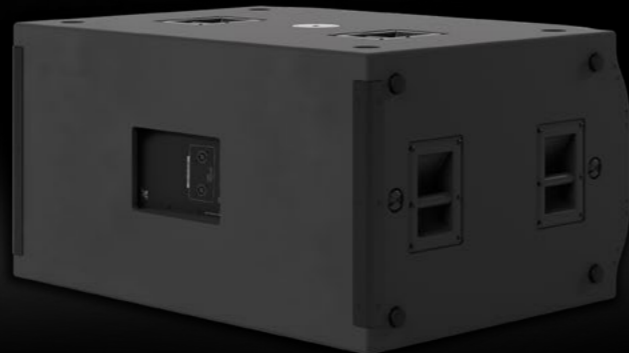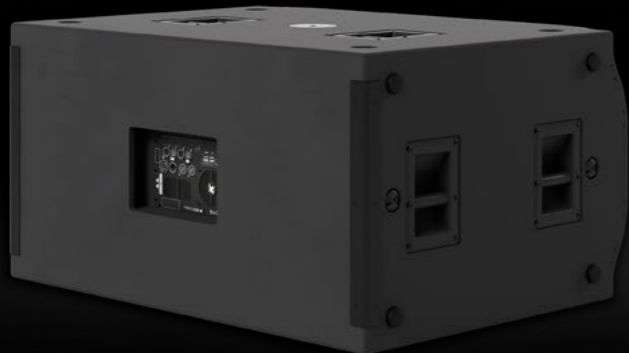

Thunder-KS5 I

General	
Type	Active subwoofer
Transducers	2 x 21" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	145
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A

Handling & Finishes	
Dimensions (WxHxD)	1140 x 590 x 850 mm (44.9 x 23.2 x 33.5 in)
Weight	104.4 kg (230.16 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	2 x 2500W @ 4ohm
Power consumption	600 VA @ 8 Ω load, Pink noise, 1/8 rated power

General	
Type	Active subwoofer
Transducers	2 x 21" neodymium magnet woofer
Frequency Response	35 Hz - 150/450 Hz (-6 dB) crossover dependant
Crossover	DSP-controlled, Low Pass @ 150 Hz, preset dependant
Max SPL	145
Coverage	Omni
Connectors	Line Input: 2x XLR-F analog / AES3 Line Output: 2x XLR-M Link analog / AES3 Speaker Output: 2x SpeakON NL4 Mains powerCON TRUE1 TOP Networking and Data: 1x RJ45 4x USB-A


Handling & Finishes	
Dimensions (WxHxD)	1140 x 590 x 850 mm (44.9 x 23.2 x 33.5 in)
Weight	104.4 kg (230.16 lb)
Material	Polyurea coated birch plywood
Colors	Black/White/Custom RAL
IP Rating	53
Output Power	2 x 2500W @ 4ohm
Power consumption	600 VA @ 8 Ω load, Pink noise, 1/8 rated power

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Thunder

Ultra-light, high power subwoofers



SUBWOOFERS

Event Productions


Theaters

Auditoriums and Concert Halls

Nightclubs and Lounges

Boardrooms and Conference Rooms

Concerts and Live Events

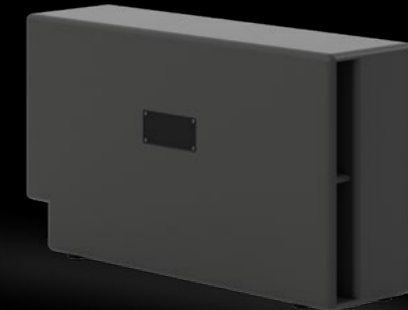


Thunder-KSC12P

new product 2023

General	
Type	Passive subwoofer
Transducers	12" neodymium magnet with 3.5" voice coil
Frequency Response	24 Hz - 150 Hz (-6 dB)
Crossover	DSP-controlled, preset dependant
Max SPL	114dB (peak)
Rated Power	1200W
Coverage	Omni
Connectors	SpeakOn NL4
Nominal Impedance	4 Ω


Handling & Finishes	
Dimensions (WxHxD)	900x 500x250 mm (35.43x19.68x9.84 in)
Weight	26 kg (57,32 lbs)
Material	Wood
Colors	Black
IP Rating	IP40

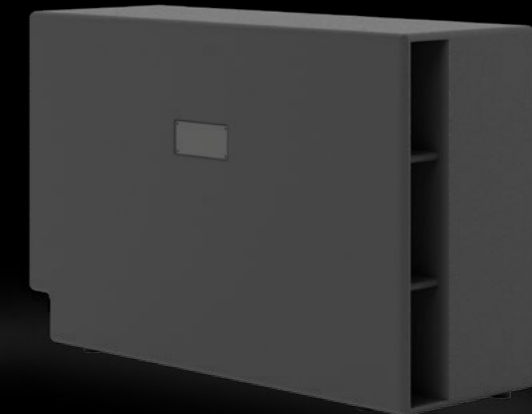


Thunder-KSC18P

General	
Type	Passive subwoofer
Transducers	18" neodymium magnet with 4.5" voice coil
Frequency Response	15 Hz - 150 Hz (-6 dB)
Crossover	DSP-controlled, preset dependant
Max SPL	134 dB (peak)
Rated Power	3600 W
Coverage	Omni
Connectors	SpeakOn NL4
Nominal Impedance	4 Ω

Handling & Finishes	
Dimensions (WxHxD)	1100 x 700 x 380 mm (43.3 x 27.6 x 15 in)
Weight	53 kg (116,85 lb)
Material	Wood
Colors	Black
IP Rating	IP40



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Mugello

Electronic beam steerable,
powered line array speakers

THE STAGE IS OUR LIFE You become the master.

It is impossible to understand the culture and comradery of the Live Event world if you are not part of it, it is a journey full of creativity with problem solving that can be incredibly fulfilling.

If you are an experienced pro sound engineer, you know what tools of the trade can consistently give you a greater opportunity to be successful and those in the know can tell you the best audio system is the one that can combine sound quality, performance, ease of assembly and compactness to make it easy to transport.

K-array is at the heart of that journey with you providing a unique live audio solution that goes beyond the industry benchmark.



REIS

Dior

LE HAAN

VINCE CANTO

SMYTHSON

LUNGINES




MONTBLANC

BREITLING


LOUIS VUITTON

LOUIS VUITTON

ROBERTO COHN




Plugins available for



discover more





Mugello

Electronic beam steerable,
powered line array speakers

SPEAKERS



Theaters



Large
Congregations




Stadiums
and Sport Venues



Nightclubs
and Lounges



Concerts
and Live Events



Mugello

Electronic beam steerable,
powered line array speakers

SPEAKERS



Theaters



Large
Congregations



Stadiums
and Sport Venues



Nightclubs
and Lounges



Concerts
and Live Events

Mugello-KH2 I

General		Handling & Finishes	
Type	Active line array element	Dimensions (WxHxD)	860 x 370 x 210 mm (33.8 x 14.6 x 8.3 in) with rigging hardware 735 x 285 x 200 mm (28.9 x 11.2 x 7.9 in) net dimensions
Transducers	2x 8" neodymium magnet woofer with 2.5" voice coil 2x compression driver with 2.5" voice coil	Weight	29 kg / 63.93 lb (with rigging hardware)
Frequency Response	120 Hz - 19 kHz (-6 dB)	Material	Polyurea coated birch plywood
Max SPL	136 dB peak	Colors	Black, White, Custom RAL
Coverage	V, 20° digitally adjustable in array H, 110°	IP Rating	IP20
Remote Control	Wi-Fi dedicated Mobile APP K-framework3 via wired Ethernet connection	Amp Module	4 ch Class D amp module
Connectors	Line Input 2x XLR-F analog / AES3 Line Output 2x XLR-M Link analog / AES3 Speaker Output 1x SpeakON NL4 Mains power CON TRUE TOP Networking and Data 1x RJ45 4x USB-A	Output Power	4 x 1500W @ 4ohm
Built-in DSP	Input gain, delay up to 330 ms, 8 full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), FIR filter for electronic beam steering Onboard preset, Level and temperature remote monitoring	Power Consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power
		Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/Permanent Signal Limiter, High Frequency Protection
		Operating Range	100-240V AC, 50-60 Hz with PFC
		Mains Connector	powerCON TRUE TOP

Mugello-KH2P I

General		Handling & Finishes	
Type	Passive line array element	Dimensions (WxHxD)	860 x 370 x 210 mm (33.8 x 14.6 x 8.3 in) with rigging hardware 735 x 285 x 200 mm (28.9 x 11.2 x 7.9 in) net dimensions
Transducers	2x 8" neodymium magnet woofer with 2.5" voice coil 2x compression driver with 2.5" voice coil	Weight	24 kg / 53 lb (with rigging hardware)
Frequency Response	120 Hz - 19 kHz (-6 dB)	Material	Polyurea coated birch plywood
Max SPL	136 dB peak	Colors	Black, White, Custom RAL
Rated Power	Bi-amp: Hi: 250 Wpeak Lo: 1200 Wpeak	IP Rating	IP54
Coverage	Hi: 16 ohm Lo: 8 ohm		
Nominal Impedance	V, 20° digitally adjustable in array H, 110°		
Connectors	SpeakON 1 1+ 1- Driver 250W@16ohm 2+ 2- Woofer 1200W@8ohm SpeakON 2 Link (SpeakON 1)		

COLORS



Black



White



Custom RAL



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

COLORS



Black




White



Custom RAL



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Mugello

Electronic beam steerable,
powered line array speakers

SPEAKERS



Theaters



Large
Congregations



Stadiums
and Sport Venues



Nightclubs
and Lounges



Concerts
and Live Events



Mugello-KH3 I

General

Type	Active line array element
Transducers	2x 12" neodymium magnet woofer with 2.5" voice coil 2x compression driver with 2.5" voice coil
Frequency Response	120 Hz - 19 kHz (-6 dB)
Max SPL	138 dB peak
Coverage	V, 20° digitally adjustable in array H, 110°
Remote Control	Wi-Fi dedicated Mobile APP K-framework3 via wired Ethernet connection
Connectors	Line Input 2x XLR-F analog / AES3 Line Output 2x XLR-M Link analog / AES3 Speaker Output 1x SpeakON NL4 Mains power CON TRUE TOP Networking and Data 1x RJ45 4x USB-A
Built-in DSP	Input gain, delay up to 330 ms, 8 full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), FIR filter for electronic beam steering Onboard preset, Level and temperature remote monitoring

Handling & Finishes

Dimensions (WxHxD)	1218 x 456 x 210 mm (47.9 x 17.9 x 8.3 in) with rigging hardware 1104 x 370 x 200 mm (43.5 x 14.5 x 7.9 in) net dimensions
Weight	43,6 kg / 96,12 lb (with rigging hardware)
Material	Polyurea coated birch plywood
Colors	Black, White, Custom RAL
IP Rating	IP20
Amp Module	4 ch Class D amp module
Output Power	4 x 1500W @ 4ohm
Power Consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power
Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/Permanent Signal Limiter, High Frequency Protection
Operating Range	100-240V AC, 50-60 Hz with PFC
Mains Connector	powerCON TRUE TOP

COLORS




Custom RAL



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

Mugello

Electronic beam steerable,
powered line array speakers



SPEAKERS



Theaters



Large
Congregations



Stadiums
and Sport Venues



Nightclubs
and Lounges



Concerts
and Live Events



Mugello-KH3P I

General

Type	Passive line array element
Transducers	2x 12" neodymium magnet woofer with 2.5" voice coil 2x compression driver with 2.5" voice coil
Frequency Response	120 Hz - 19 kHz (-6 dB)
Max SPL	138 dB peak
Rated Power	Bi-amp: Hi: 250 Wpeak Lo: 1200 Wpeak
Coverage	Hi: 16 ohm Lo: 8 ohm
Nominal Impedance	V, 20° digitally adjustable in array H, 110°
Connectors	SpeakON 1 1+ 1- Driver 250W@16ohm 2+ 2- Woofer 1200W@8ohm SpeakON 2 Link (SpeakON 1)

Handling & Finishes

Dimensions (WxHxD)	1218 x 456 x 210 mm (47.9 x 17.9 x 8.3 in) with rigging hardware 1104 x 370 x 200 mm (43.5 x 14.5 x 7.9 in) net dimensions
Weight	38,6 kg / 85 lb (with rigging hardware)
Material	Polyurea coated birch plywood
Colors	Black, White, Custom RAL
IP Rating	IP54


COLORS



Custom RAL



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Mugello

Electronic beam steerable,
powered line array speakers

SPEAKERS



Theaters



Large Congregations



Stadiums and Sport Venues



Nightclubs and Lounges




Concerts and Live Events



Mugello

Electronic beam steerable,
powered line array speakers



SUBWOOFERS



Theaters



Large Congregations



Stadiums and Sport Venues



Nightclubs and Lounges



Concerts and Live Events



Mugello-KH5 I

General

Type	Active line array element
Transducers	2x 15" neodymium magnet woofer with 2.5" voice coil 4x compression driver with 2.5" voice coil
Frequency Response	120 Hz – 19 kHz (-6 dB)
Max SPL	140 dB peak
Coverage	V. 7° digitally adjustable in array H. 110°
Remote Control	Wi-Fi dedicated Mobile APP K-framework3 via wired Ethernet connection
Connectors	Line Input 2x XLR-F analog / AES3 Line Output 2x XLR-M Link analog / AES3 Speaker Output 1x SpeakON NL4 Mains power CON TRUE TOP Networking and Data 1x RJ45 4x USB-A
Built-in DSP	Input gain, delay up to 330 ms, 8 full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), FIR filter for electronic beam steering Onboard preset, Level and temperature remote monitoring

Handling & Finishes

Dimensions (WxHxD)	1218 x 604 x 210 mm (47.9 x 23.8 x 8.3 in) with rigging hardware 1104 x 520 x 200 mm (43.5 x 20.5 x 7.9 in) net imensions
Weight	64 kg / 134.48 lb (with rigging hardware)
Material	Polyurea coated birch plywood
Colors	Black, White, Custom RAL
IP Rating	IP20
Amp Module	4 ch Class D amp module
Output Power	4 x 1500W @ 4ohm
Power Consumption	600 W @ 8 Ω load, Pink noise, 1/4 rated power
Protections	Over Temp. (Power Limiting – Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/Permanent Signal Limiter, High Frequency Protection
Operating Range	100-240V AC, 50-60 Hz with PFC
Mains Connector	powerCON TRUE TOP

Mugello-KH5P I

General

Type	Passive line array element
Transducers	2x 15" neodymium magnet woofer with 2.5" voice coil 4x compression driver with 2.5" voice coil
Frequency Response	120 Hz – 19 kHz (-6 dB)
Max SPL	140 dB peak
Rated Power	Quad-amp: Hi: 2x 250 Wpeak Lo: 2x 800 Wpeak
Coverage	Hi: 16 ohm Lo: 8 ohm
Nominal Impedence	V. 7° digitally adjustable in array H. 110°
Connectors	SpeakON 1 1+ 1- Driver 250W@16ohm 2+ 2- Woofer 800W@8ohm SpeakON 2 1+ 1- Driver 250W@16ohm 2+ 2- Woofer 800W@8ohm SpeakON 3 Link (SpeakON 1) SpeakON 4 Link (SpeakON 2)

Handling & Finishes

Dimensions (WxHxD)	1218 x 604 x 210 mm (47.9 x 23.8 x 8.3 in) with rigging hardware 1104 x 520 x 200 mm (43.5 x 20.5 x 7.9 in) net imensions
Weight	59 kg / 130 lb (with rigging hardware)
Material	Polyurea coated birch plywood
Colors	Black, White, Custom RAL
IP Rating	IP54

COLORS




The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

COLORS



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Firenze

Electronic beam steerable, state-of-the-art touring systems

STATE-OF-THE-ART TOURING SYSTEMS


Powerful touring systems with the ability to precisely and independently control each element of the array, eliminating noise pollution, providing continuous even coverage and featuring a compact design.

The **Slim Array Technology (SAT)** and **Electronic Beam Steering (EBS)** put K-array's Firenze Systems on the forefront of cutting-edge live sound reinforcement.



discover
more






Firenze

Electronic beam steerable, state-of-the-art touring systems




Firenze


Electronic beam steerable, state-of-the-art touring systems



SPEAKERS

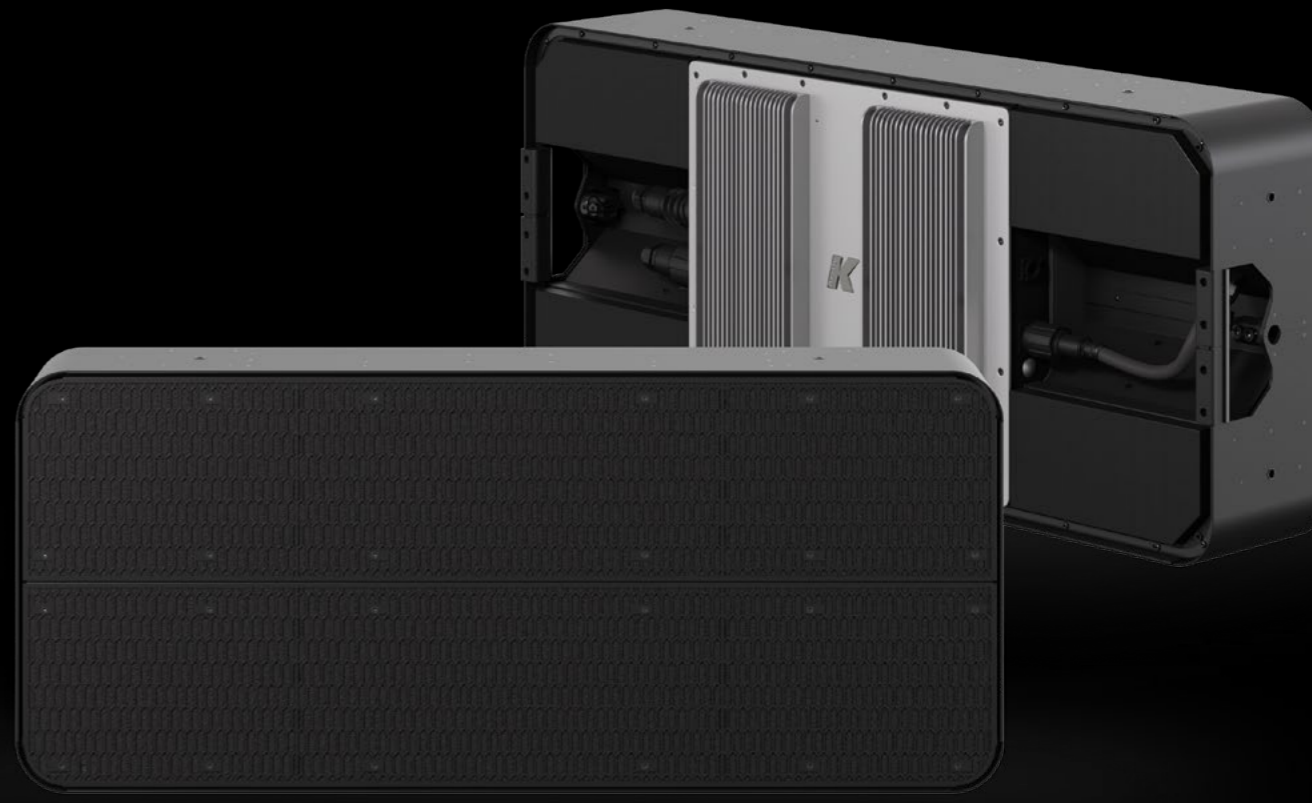

SPEAKERS




Firenze-KH7

General		Handling & Finishes	
Type	Active line array element	Dimensions (WxHxD)	1170 x 350 x 200 mm (46 x 13.8 x 7.9 in)
Transducers	4x Coaxial 12" Neodymium magnet driver with 3" voice coil + compression driver with 2" voice coil"	Weight	52 kg (114.64 lb)
Frequency Response	90 Hz - 18 kHz (-6 dB)	Material	Stainless Steel
Max SPL	141 dB peak	Colors	Black, White, Custom RAL
Coverage	100° H / 30° V or 30° H / 100° V + digital adjustment with Electronic Beam Steering	IP Rating	IP53
Controllers	Remote control with dedicated PC software via Ethernet	Amp Module	4-ch., switch mode, class D
Connectors	Analog: 1x XLR (bal) input signal 1x XLR (bal) parallel output Digital: 1x XLR AES3 input	Output Power	4x 2000 W @ 4 Ω 1% THD+N
Built-in DSP	Input gain, delay up to 2 s, Full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), FIR filter for digital beam steering Level and Temperature remote monitoring	Power Consumption	600 W @ 8 Ω load, Pink noise 1/8 rated power
		Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/Permanent Signal Limiter, High Frequency Protection*power
		Operating Range	100-240V AC, 50-60 Hz with PFC
		Mains Connector	powerCON True with link inlet

Firenze-KH8


General		Handling & Finishes	
Type	Active line array element	Dimensions (WxHxD)	1170 x 500 x 226 mm (46.1 x 19.7 x 8.89 in)
Transducers	8x 8" Neodymium magnet woofer with 2.5" voice coil 8x 4" Neodymium magnet drivers with 1.5" voice coil 4x Neodymium magnet compression driver with 1.5" voice coil	Weight	75.2 kg (159.84 lb)
Frequency Response	70 Hz - 18 kHz (-3 dB)	Material	Stainless Steel
Max SPL	145 dB peak	Colors	Black, White, Custom RAL
Coverage	Horizontal: 120° Vertical: digitally adjustable with Electronic Beam Steering	IP Rating	Speaker Box: IP45 / Electronics: IP65
Controllers	Remote control with dedicated PC software via Ethernet	Amp Module	4-ch., switch mode, class D
Connectors	Analog, AES3 and Remote control: Easy-grip metal locking LK25 connector (MIL C 5015 and VG95234 spec.)	Output Power	8x 2000 W @ 4 Ω 1% THD+N
Built-in DSP	Input gain, delay up to 2 s, Full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), FIR filter for digital beam steering Level and Temperature remote monitoring	Power Consumption	1250 W @ 4 Ω load, Pink noise 1/8 rated power
		Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/Permanent Signal Limiter, High Frequency Protection
		Operating Range	100-240V AC, 50-60 Hz with PFC
		Mains Connector	powerCON True



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com




Firenze

Electronic beam steerable, state-of-the-art touring systems



Firenze

Electronic beam steerable, state-of-the-art touring systems



SUBWOOFERS


Concerts and Live Events

Large Congregations

Stadiums and Sport Venues

Nightclubs and Lounges

Theaters

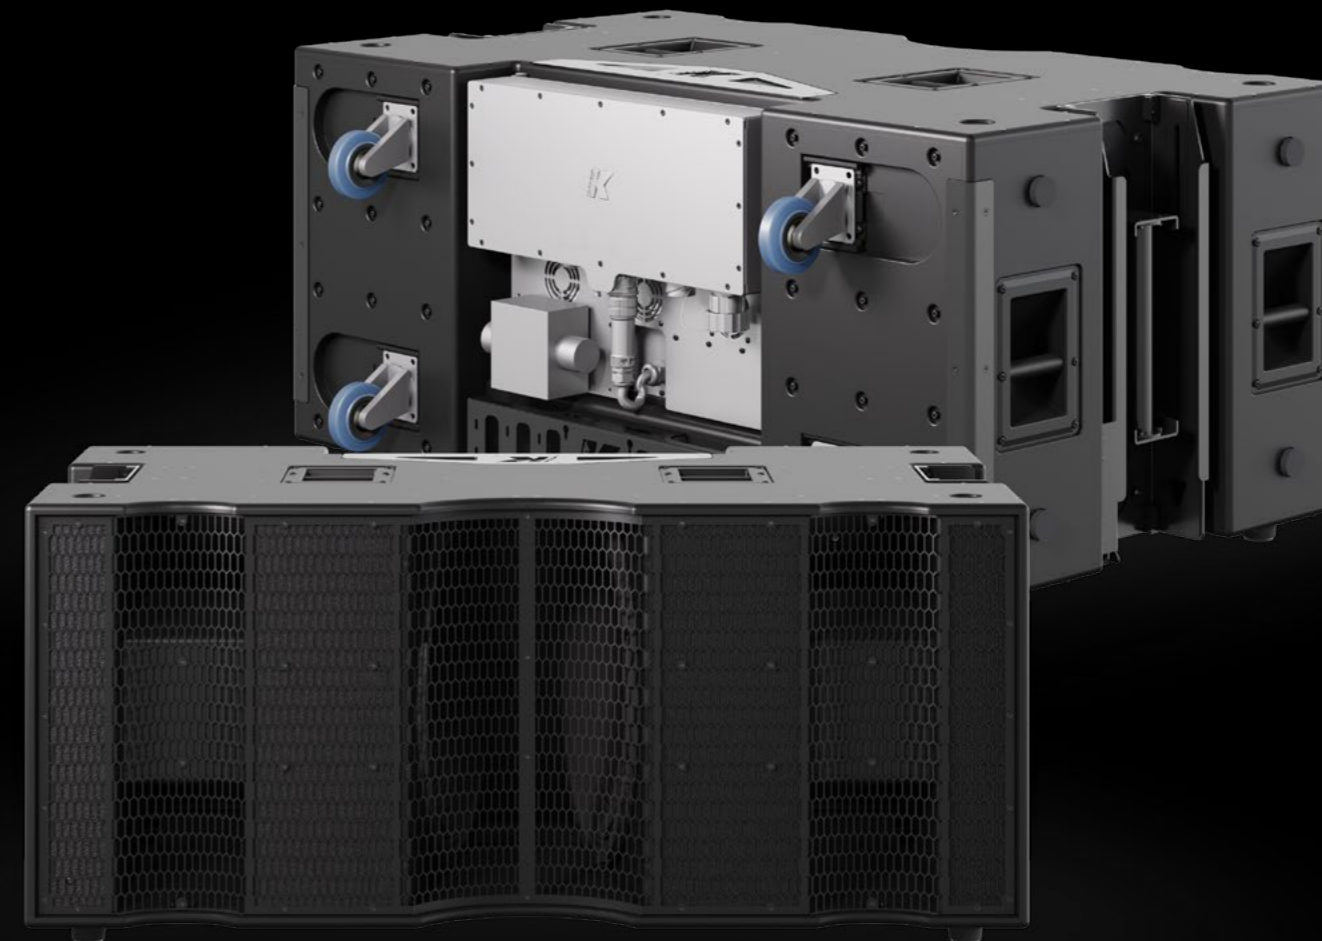

SUBWOOFERS

Concerts and Live Events

Large Congregations

Stadiums and Sport Venues

Nightclubs and Lounges

Theaters

Firenze-KS7

General		Handling & Finishes	
Type	Active subwoofer	Dimensions (WxHxD)	1162 x 590 x 851 mm (45.7 x 23.2 x 33.5 in)
Transducers	2x 21" Neodymium magnet woofer with 5.31" voice coil	Weight	104.4 kg (230.16 lb)
Frequency Response	25 Hz - 120 Hz (-6 dB)	Material	Wood
Max SPL	141 dB peak	Colors	Black, White, Custom RAL
Coverage	Omni	IP Rating	IP53
Controllers	Remote control with dedicated PC software via Ethernet	Amp Module	2-ch., switch mode, class D
Connectors	Analog: 1x XLR (bal) input signal 1x XLR (bal) parallel output Digital: 1x XLR AES3 input	Output Power	2x 3500 W @ 2 Ω 1% THD+N
Built-in DSP	Input gain, delay up to 2 s, Full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), Level and Temperature remote monitoring	Power Consumption	600 W @ 4 Ω load, Pink noise 1/8 rated power
		Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/Overload Output Protection, Power Limiting, Clip Limiter/Permanent Signal Limiter, High Frequency Protection
		Operating Range	100-240V AC, 50-60 Hz with PFC
		Mains Connector	powerCON True with link inlet

Firenze-KS8

General		Handling & Finishes	
Type	Active subwoofer	Dimensions (WxHxD)	1420 x 600 x 775 mm (55.90 x 23.6 x 30.5 in)
Transducers	2x 21" Neodymium magnet woofer with 5.31" voice coil	Weight	148 kg (326.3 lb)
Frequency Response	25 Hz - 120 Hz (-6 dB)	Material	Wood
Max SPL	148 dB peak	Colors	Black, White, Custom RAL
Coverage	Omni	IP Rating	Speaker Box: IP45 / Electronics: IP65
Controllers	Remote control with dedicated PC software via Ethernet	Amp Module	Switching-mode, class D with IPAL® technology
Connectors	Analog, AES3 and Remote control: Easy-grip metal locking LK25 connector (MIL C 5015 and VG95234 spec.)	Output Power	8500 W @ 1 Ω
Built-in DSP	Input gain, delay up to 2 s, Full parametric IIR filters (Peaking, Shelving, Hi/Lo pass, Hi/Lo Butterworth), Level and Temperature remote monitoring	Power Consumption	400 VA
		Protections	Over Temp. (Power Limiting - Thermal Shutdown), Short Circuit/Overload Output Protection, Excursion limiter, Current & Power limiter, Current clamp, Clip limiter, Brownout limiter.
		Operating Range	100-240V AC, 50-60 Hz with PFC
		Mains Connector	powerCON True

COLORS
Black
White
Custom RAL




The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

COLORS
Black
White
Custom RAL



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



Mastiff

Low-profile, high power stage monitor

MONITORS


Concerts and Live Events

Large Congregations

Broadcast and Studios

Nightclubs and Lounges

Theaters

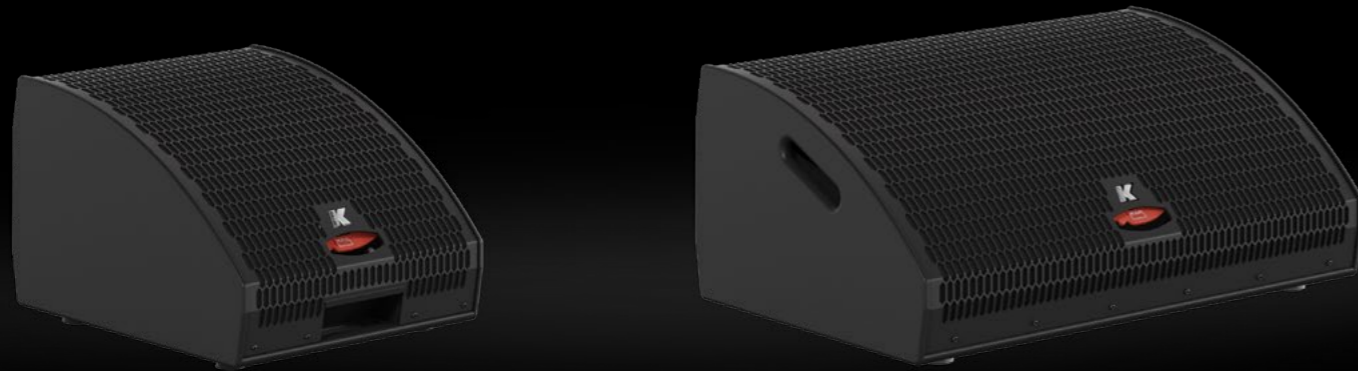

Mastiff-KM112P


General	
Type	Passive subwoofer
Transducers	Coaxial 12" woofer + 2.4" compression driver
Frequency Response	70 Hz - 19 kHz (-6 dB)
Max SPL	133 dB (peak)
Rated Power	1200 W
Coverage	Selectable: V/H - 30°/100° 100°/30°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 Ω

Handling & Finishes	
Dimensions (WxHxD)	450 x 351 x 530 mm (17.7 x 13.8 x 20.9 in)
Weight	21,2 kg (46.74 lb)
Material	Wood/Stainless Steel
Colors	Black, White, Custom RAL
IP Rating	IP20

Mastiff-KM312P

General	
Type	Passive subwoofer
Transducers	2 x 12" neodymium magnet woofer, 1 x Coaxial 12" woofer + 2.4" compression driver
Frequency Response	60 Hz - 19 kHz (-6 dB)
Max SPL	138dB (peak)
Rated Power	2000W + 1000W
Coverage	Selectable: V/H - 30°/100° 100°/30°
Connectors	SpeakOn NL4 1+ 1- (MF-HF); 2+ 2- (LF)
Nominal Impedance	LF: 4 Ω MF-HF: 8 Ω


Handling & Finishes	
Dimensions (WxHxD)	820 x 351 x 530 mm (32.3 x 13.8 x 20.9 in)
Weight	37,5 kg (82.67 lb)
Material	Wood/Stainless Steel
Colors	Black, White, Custom RAL
IP Rating	IP20



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

Mastiff

Low-profile, high power stage monitor



discover more








Capture

Take advantage of our line array technology in a mini mic









MICROPHONE

Capture-KMC20

-  Theaters
-  Auditoriums and Concert Halls
-  Houses of Worship
-  Boardrooms and Conference Rooms
-  Broadcast and Studios



Capture-KMC50

-  Theaters
-  Auditoriums and Concert Halls
-  Houses of Worship
-  Boardrooms and Conference Rooms
-  Broadcast and Studios
-  Large Congregations
-  Stadiums and Sport Venues
-  Concerts and Live Events

Capture-KMC20V / KMC20H / KMC20

General	
Transducers Type	8 x 4 mm electret condenser
Frequency Response	65 – 15000 Hz (-6 dB)
Polar Pattern	Cardioid array
Sensitivity	-37 dBV (Re 94 dB SPL)
Max Input SPL	100 dB
Phantom Supply Voltage	36 to 52 Vdc, (+) pins 2 and 3

Handling & Finishes

Dimension (WxHxD)	6 x 200* x 6 mm (0.24 x 7.90 x 0.24 in)
Weight	0.032 kg (0.070 lb)
Finishes	Ruthenium Plated Brass

Capture-KMC50

General	
Transducers Type	16 x 6 mm electret condenser
Frequency Response	55 – 20000 Hz (-6 dB)
Polar Pattern	Cardioid array
Sensitivity	-39 dBV (Re 94 dB SPL)
Max Input SPL	110 dB
Phantom Supply Voltage	36 to 52 VDC, (+) pins 2 and 3

Handling & Finishes

Dimension (WxHxD)	10 x 510 x 10 mm (0.39 x 20.07 x 0.39 in)
Weight	0.080 kg (0.176 lb)
Finishes	Ruthenium Plated Brass

Power Supply

Preamp/ifier	Single unit: wired preamplifier Multiple units: preamplifier box requiring external 5 VDC 500 mA power supply
--------------	--

* Net length of the microphone bar, base excluded.

Duetto

Ultra-mini earbuds

IN EAR



Duetto-KD6T

General	
Transducers	6 mm neodymium magnet
Frequency Response	5 Hz – 23 kHz
Sensitivity	105 ± 3 dB @ 1 kHz (1W/1m)
Impedance	16Ω ±15%
Jack plug	3.5 mm, straight

Handling & Finishes

Finishes / Color	24K Gold, Titanium-anodized Oxidation
Material	Aluminum Alloy

Microphone

Sensitivity	-42 dB
Frequency Response	100 - 10000 Hz
Polar Pattern	Omnidirectional

Bluetooth

Communication System	Version 5
Output	Specification Power Class 2
Maximum Communication Range	Line of sight approx. 10 mt (33')
Compatible Bluetooth Profiles	A2DP, AVRCP, HFP, HSP
Support Codec	AAC, SBC

Battery

Type	DC 3.7 V lithium polymer rechargeable battery
Life	Up to 6 hrs (Charging time: approx. 3 hrs for 0-100% charge)

Duetto-KD6B

Transducers	6 mm neodymium magnet
Frequency Response	5 Hz – 23 kHz
Sensitivity	105 ± 3 dB @ 1 kHz (1W/1m)
Impedance	16Ω ±15%
Jack plug	3.5 mm, straight

Finishes / Color	Black
Material	Aluminum Alloy

Sensitivity	-42 dB
Frequency Response	100 - 10000 Hz
Polar Pattern	Omnidirectional

Duetto-KD6BT

Transducers	6 mm neodymium magnet
Frequency Response	5 Hz – 23 kHz
Sensitivity	105 ± 3 dB @ 1 kHz (1W/1m)
Impedance	16Ω ±15%

Finishes / Color	Black
Material	Aluminum Alloy

Sensitivity	-42 dB
Frequency Response	100 - 10000 Hz
Polar Pattern	Omnidirectional

Communication System	Version 5
Output	Specification Power Class 2
Maximum Communication Range	Line of sight approx. 10 mt (33')
Compatible Bluetooth Profiles	A2DP, AVRCP, HFP, HSP
Support Codec	AAC, SBC

Type	DC 3.7 V lithium polymer rechargeable battery
Life	Up to 6 hrs (Charging time: approx. 3 hrs for 0-100% charge)

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com



discover
more

The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com

discover
more



The product performance data shown here is a first reference. We strongly advise that you download the latest datasheet online at www.k-array.com




43°57'00"N-11°22'59.88"E
AN AUTHENTIC PLACE



K-ARRAY WARRANTY

K-array surl warrants its products against defects in material or workmanship. The term of the **K-array surl Warranty is five years** from the original date of purchase of the product and their accessories. This warranty may be transferred to a subsequent owner during the warranty period. However, such a transfer shall not extend the warranty period beyond the original warranty period of five years from the original date of purchase stated on the invoice from the distributor to the end client.



www.k-array.com 

In accordance with its policy of continuous product development, K-array reserves the right to introduce any changes to its products without prior notice. Materials, colors and data presented in the catalog are only for reference. K-array is available to customize systems, finishes and new applications upon request.

All rights reserved © 2023



Designed and Made in Italy

K-ARRAY surl

Via P. Romagnoli 17 | 50038 Scarperia e San Piero - Firenze - Italy

T +39 055 84 87 222 | info@k-array.com

www.k-array.com